

DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

CLB-3073

LED dome bollard with glass refractor



Extruded aluminum housing with flush Mounting Base and Vandal-Resistant Screws, Domed Top, Powder coat Finish over a Chromate Conversion Coating. Internal Ballast Tray for Easy Maintenance. IES Type V Glass Clear Prismatic Borosilicate Glass Refractor. Clear Polycarbonate Lens. Mounting Kit with 8" Anchor Bolts (Included). LED Array 14.5w, System 17w. Ideal for lighting pedestrian walkways and accenting the exterior grounds of office and apartment buildings, hotel and parks. Comes with a 5 year/50,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Lumileds LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >200,000 hours

CONSTRUCTION

- Extruded aluminum body
- Powder coat bronze finish (standard) various colors available (custom)
- Clear polycarbonate lens over a prismatic borosilicate glass refractor (standard)
- Silicone gasket to prevent leakage and provide weather-tight protection
- Mounting: Mounting kit with 8" anchor bolts included

OPTIONS

- (WC) Wireless controls
- (TIII) Type III refractor
- (EMR) Emergency Battery back up
- (BAK4) Mounting Kit (3) 4" Anchor Bolts
- (BAK8) Mounting Kit (3) 8" Anchor Bolts (STANDARD)
- (BAK12) Mounting Kit (3) 12" Anchor Bolts
- (BAK15) Mounting Kit (3) 15" Anchor Bolts




Model Number	INPUT POWER	LUMEN OUTPUT	SCOTOPIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
CLB-3073-15LED	17W	1,151	2,089	5000K	80+	>200,000	120-277V	50/60HZ	70w MH
CLB-3073-20CLED	20W	2,304	3,686	5000K	70	>200,000	120-277V	50/60HZ	100w MH

Ordering Guide

Example: (CLB-3073-15LED-50-MV-BLK-EMR)

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
CLB-3073	15W-15LED 20W-20CLED	50-5000K	MV=120-277V 480-480V	STANDARD: BZ- BRONZE ADD'L COST: GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM	(WC) Wireless controls (TIII) type 3 refractor (EMR) Emergency battery back up (BAK4) Mounting Kit (3) 4" Anchor Bolts (BAK8) Mounting Kit (3) 8" Anchor Bolts (standard) (BAK12) Mounting Kit (3) 12" Anchor Bolts (BAK15) Mounting Kit (3) 15" Anchor Bolts

Dimensions

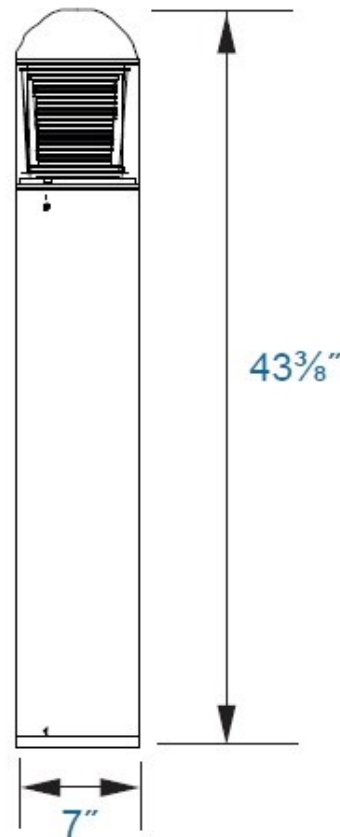

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: www.crystallighting.us

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA