



| | |
|-------------|--|
| DATE | |
| PROJECT | |
| TYPE | |
| NOTE | |
| PREPARED BY | |

CLB-3086

Stainless Steel LED Dome Bollard with Louvers

Formed 316 stainless steel housing with flush Mounting Base and Vandal-Resistant Screws, Domed Top. Internal Ballast Tray for Easy Maintenance. Cast Aluminum Louvers. Clear Polycarbonate Lens. Mounting Kit with 8" Anchor Bolts (Included). LED Array 14.5w, System 17w. Ideal for lighting pedestrian walkways and accenting the exterior grounds of office and apartment buildings, hotel and parks. Comes with a 5 year/50,000 hour limited warranty.



FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)

CONSTRUCTION

- Formed stainless steel body with die-cast aluminum louvers
- Brushed natural stainless steel finish
- Clear polycarbonate lens standard
- Silicone gasket to prevent leakage and provide weather-tight protection
- Mounting: Mounting kit with 8" anchor bolts included

OPTIONS

- (WC) Wireless controls
- (EMR) Emergency Battery back up
- (BAK4) Mounting Kit (3) 4" Anchor Bolts
- (BAK8) Mounting Kit (3) 8" Anchor Bolts (STANDARD)
- (BAK12) Mounting Kit (3) 12" Anchor Bolts




| Model Number | INPUT POWER | LUMEN OUTPUT | SCOTOPIC | COLOR TEMP (CCT) | CRI | RATED LIFE (L70) | INPUT VOLTAGE | INPUT FREQUENCY | HID Equivalent |
|----------------|-------------|--------------|----------|------------------|-----|------------------|---------------|-----------------|----------------|
| CLB-3086-15LED | 17 | 1,151 | 2,089 | 5000K | 80+ | >200,000 | 120-277V | 50/60HZ | 70w MH |

Ordering Guide

Example: (CLB-3086-15LED-50-MV-EMR)

| MODEL | WATTS | COLOR TEMP | VOLTAGE | FINISH | OPTIONS |
|----------|-----------|------------|-------------------------|-----------------|---|
| CLB-3086 | 15W-15LED | 50-5000K | MV=120-277V 480-480V | STAINLESS STEEL | (WC) Wireless controls (EMR) Emergency battery back up (BAK4) Mounting Kit (3) 4" Anchor Bolts (BAK8) Mounting Kit (3) 8" Anchor Bolts (STANDARD) (BAK12) Mounting Kit (3) 12" Anchor Bolts (BAK15) Mounting Kit (3) 15" Anchor Bolts |

Dimensions

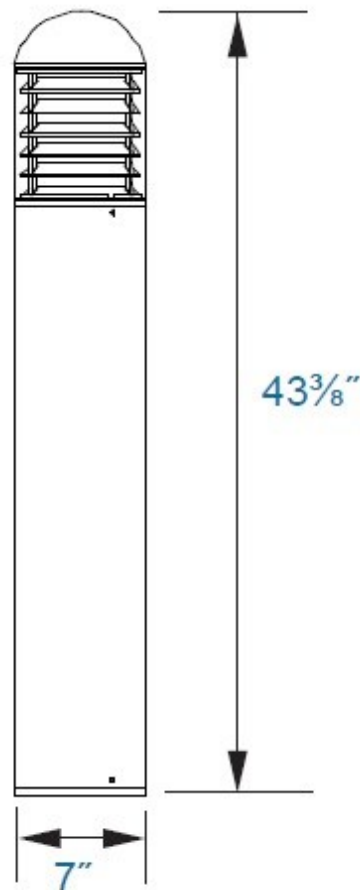

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: www.crystallighting.us

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA

Polargraphs

