

DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

CLB-3087

Stainless steel LED bollard with Aluminum Cone Reflector



Formed 316 stainless steel housing with flush Mounting Base and Vandal-Resistant Screws, Domed top, Powder coat Finish over a Chromate Conversion Coating. Internal Ballast Tray for Easy Maintenance. Specially Designed Aluminum Cone Reflector for LED. Clear Polycarbonate Lens. Mounting Kit with 8" Anchor Bolts (Included). LED Array 14.5w, System 17w. Ideal for lighting pedestrian walkways and accenting the exterior grounds of office and apartment buildings, hotel and parks. Comes with a 5 year/50,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >60,000 hours

CONSTRUCTION

- Formed 316 stainless steel body
- Natural brushed stainless steel finish
- Clear polycarbonate lens standard with conical reflector inside
- Silicone gasket to prevent leakage and provide weather-tight protection
- Mounting: Mounting kit with 8" anchor bolts included

OPTIONS

- (WC) Wireless controls
- (EMR) Emergency Battery back up
- (BAK4) Mounting Kit (3) 4" Anchor Bolts
- (BAK8) Mounting Kit (3) 8" Anchor Bolts (STANDARD)
- (BAK12) Mounting Kit (3) 12" Anchor Bolts
- (BAK15) Mounting Kit (3) 15" Anchor Bolts




Model Number	INPUT POWER	LUMEN OUTPUT	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY
CLB-3087-15LED	17	1,918	5000K	80+	>60,000	120~277V	50/60HZ
CLB-3087-20LED	25	2,752	5000K	80+	>60,000	120~277V	50/60HZ

Ordering Guide

Example: (CLB-3087-15LED-50-MV-EMR)

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
CLB-3087	15W-15LED 20W-20LED	30-3000K 40-4000K 50-5000K 57-5700K 65-6500K	MV—120-277V 480—480V	STAINLESS STEEL	(WC) Wireless controls (EMR) Emergency battery back up (BAK4) Mounting Kit (3) 4" Anchor Bolts (BAK8) Mounting Kit (3) 8" Anchor Bolts (STANDARD) (BAK12) Mounting Kit (3) 12" Anchor Bolts (BAK15) Mounting Kit (3) 15" Anchor Bolts

Dimensions

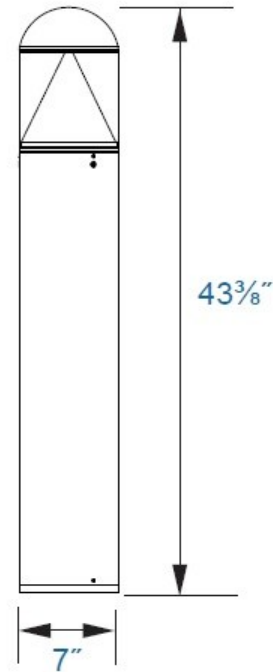

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: www.crystallighting.us

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA