




|             |  |
|-------------|--|
| DATE        |  |
| PROJECT     |  |
| TYPE        |  |
| NOTE        |  |
| PREPARED BY |  |

## CLP-SL-L5

## Hexagonal LED Post Top fixture

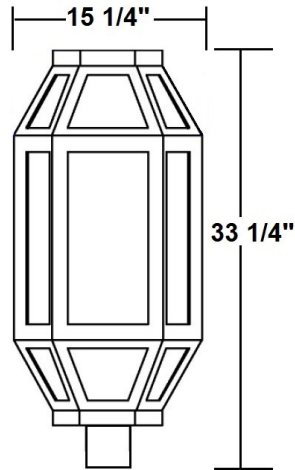

CLP-SL-L5-STB  
With Solid top /bottom

Hexagonal LED Post top fixture, suitable for wet locations. Perfect for lighting up residential exteriors, walkways, perimeters, school campuses, commercial spaces, parking lots, recreational parks. This fixture has various light distribution options. Comes with a 10 year/50,000hr limited warranty.

### FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >200,000 hours

### CONSTRUCTION

- Housing is heavy-duty die-cast aluminum material
- Powder coat finish (standard)
- Clear prismatic acrylic Type 5 (standard), clear prismatic polycarbonate lens (optional)
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Comes ready to mount on top of a 3" round pole (standard) can be built to mount on other size poles and shapes.

### OPTIONS

- (OCC) Motion sensor
- (PC) Button photo cell
- (WC) Wireless controls
- (TYPE3) Type III OPTIC
- (TYPE4) Type IV OPTIC
- (TYPE5) Type V OPTIC
- (CSA) Clear Seedy Acrylic
- (OA) Opal Acrylic
- (FA) Frosted Acrylic Lens



| Model Number      | INPUT POWER | LUMEN OUTPUT | LED MODULE COUNT | COLOR TEMP (CCT) | CRI | RATED LIFE (L70) | INPUT VOLTAGE | INPUT FREQUENCY | HID Equivalent |
|-------------------|-------------|--------------|------------------|------------------|-----|------------------|---------------|-----------------|----------------|
| CLP-SL-L5-35CLED  | 42W         | 5,022        | 1-12UP @ 1050mA  | 5000K            | 70+ | >200,000         | 120-277V      | 50/60HZ         | 175w HPS       |
| CLP-SL-L5-75CLED  | 84W         | 10,044       | 2-12UP @ 1050mA  | 5000K            | 70+ | >200,000         | 120-277V      | 50/60HZ         | 250w HPS       |
| CLP-SL-L5-90CLED  | 97w         | 13,193       | 3-12UP @ 900mA   | 5000K            | 70+ | >200,000         | 120-277v      | 50/60Hz         | 400w PSMH      |
| CLP-SL-L5-120CLED | 129w        | 17,591       | 4-12up @ 900mA   | 5000K            | 70+ | >200,000         | 120-277v      | 50-60Hz         | 400w HPS       |

### Ordering Guide

Example: (CLP-SL-L5-35CLED-50-MV-BZ-OA-TYP5-WC)

| MODEL                     | WATTS  | COLOR TEMP  | VOLTAGE                 | FINISH   | LENS  | OPTIONS  |
|---------------------------|--|---|-------------------------|--|---|--|
| CLP-SL-L5<br>CLP-SL-L5STB | 35W-35CLED<br>75W-75CLED<br>90W-90CLED<br>120W-120CLED | 27-2700K<br>30-3000K<br>35-3500K<br>40-4000K<br><b>50-5000K</b><br>57-5700K<br>65-6500K | MV=120-277V<br>480-480V | BZ- BRONZE<br>GRY-GRAY<br>BLK-BLACK<br>WH- WHITE<br>CUS-CUSTOM | CSA-CLEAR SEEDY ACRYLIC<br>OA- OPAL ACRYLIC<br>FA- FROSTED ACRYLIC<br>CUS-CUSTOM<br>NL- NO LENS | OCC- MOTION SENSOR<br>PC- BUTTON PHOTO CELL<br><b>WC- WIRELESS CONTROL</b><br>TYPE3- TYPE III OPTIC<br>TYPE4-TYPE IV OPTIC<br><b>TYPE5- TYPE V OPTIC</b> |

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: [www.crystallighting.us](http://www.crystallighting.us)

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA