



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

CLV-42**Interior Vanity Wall Mount****FEATURES**

- Energy Savings: Over 66% compared to HID light sources
- Operating Temperatures: -40°C ~ 60°C
- Driver: Constant current, 120~277v (standard), 50/60Hz
- IP65, suitable for wet locations
- Photo control along with EMR (optional)
- Operating life: >200,000 hours

**CONSTRUCTION**

- Aluminum Housing
- UV stabilized powder coat white powder coat
- Opal acrylic
- Lamping: 1-Philips strip model

OPTIONS

- (PC) Photo control
- (EMR) Emergency Battery
- (DPB) Deep Pan Back
- (VP) Vandal Proof

MODEL #	INPUT POWER	LUMEN OUTPUT	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY
CLV-42-10CLED	10W	800	5000K	75	>200,000	120~277v	60/60Hz
CLV-42-20CLED	20W	1,600	5000K	75	>200,000	120~277v	50/60Hz

Ordering Guide

Example: CLV-42-20CLED-50-MV-WH-EMR-PC-DPB-VP

CLV-42-213


MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
CLV-42	10W-10CLED	30-3000K	MV: 120~277V	WH-WHITE	PC-PHOTO CONTROL
	20W-20CLED	35-3500K			EMR-EMERGENCY BATTERY
		40-4000K			DPB- DEEP PAN BACK
		50-5000K			VP-VANDAL PROOF

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: www.crystallighting.us

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA

Dimensions

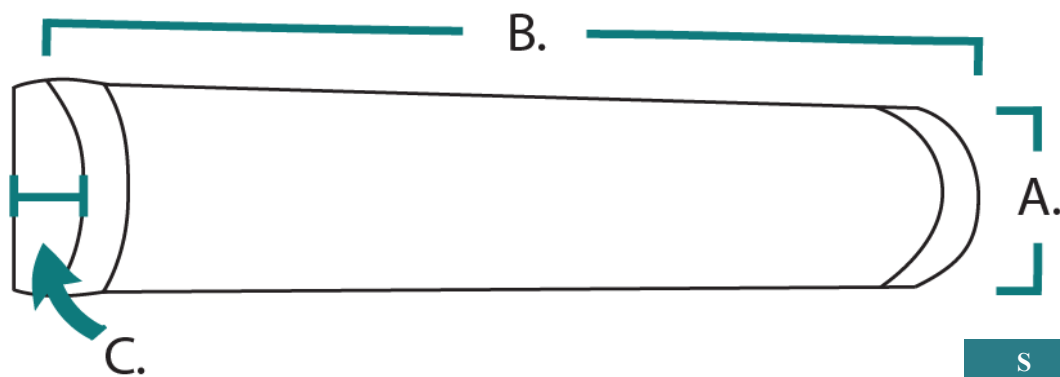

	S	M	L	XL
A.	6"	6"	6"	6"
B.	19"	25"	37"	49"
C.	5"	5"	5"	5"