





DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

LG-CLP-336AL

Large Architectural LED area light fixture

Architectural LED area light fixture, suitable for wet locations. Perfect for lighting up residential exteriors, walkways, entry ways, perimeters, storage areas, school campuses, Industrial/commercial spaces, parking lots, recreational parks. This fixture has a wide light distribution. Comes with a 5 year/50,000 hour limited warranty.

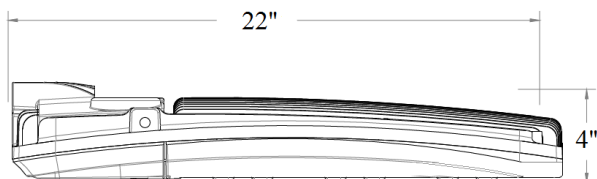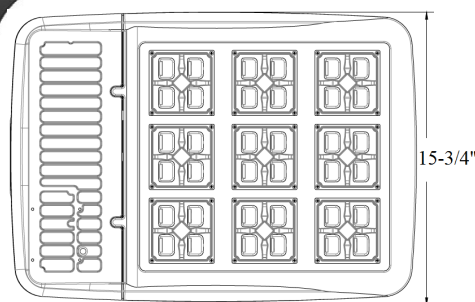

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >60,000 hours

CONSTRUCTION

- Housing is heavy-duty die-cast aluminum & hinged front door frame.
- 1/2" Coin plugs with O-rings for conduit, sensors or photo cell
- Powder coat bronze finish (standard) various colors available (custom).
- Clear glass lens standard, prismatic glass lens optional
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Mounts directly onto a flat poles, optional round pole or wall mount adapters available



Model Number	INPUT POWER	DELIVERED LUMENS	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
LG-CLP-336FAL-180CLED	185W	27,381	5000K	70+	>200,000	120-277V	50/60HZ	750w PSMH
LG-CLP-336FAL-200CLED	205W	30,087	5000K	70+	>200,000	120-277V	50/60HZ	1000w MH
LG-CLP-336FAL-240CLED	250W	35,329	5000K	70+	>200,000	120-277V	50/60HZ	1000w PSMH
LG-CLP-336FAL-280CLED	295W	40,342	5000K	70+	>200,000	120-277V	50/60HZ	1000w PSMH
LG-CLP-336FAL-300CLED	315w	42,770	5000K	70+	>200,000	120-277V	50/60HZ	1000w HPS

Ordering Guide

Example: (LG-CLP-336AL-200CLED-50-MV-E-SF-BZ-OC)

MODEL	WATTS	COLOR TEMP	VOLTAGE	OPTICS	MOUNTING	FINISH	OPTIONS
LG-CLP-336AL	180W-180CLED 200W-200CLED 240W-240CLED 280W-280CLED 300W-300CLED	27-2700K 30-3000K 35-3500K 40-4000K 50-5000K 57-5700K 65-6500K	MV=120-277V 480-480V	A=24° B=50° C=78° D=TYPE II E=TYPE III F=TYPE IV G=TYPE V	KHA=Kitty Hawk Arm SF= Slip fitter MA= Mounting Arm Adapter LY= Large Yoke SY= Small Yoke EH=Easy-Hang Wall Bracket NM=No Mount	BZ- BRONZE GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM	OC= MOTION SENSOR PC=BUTTON PHOTO CELL R3=3 Pin twist lock Photo cell R7=7 Pin Receptacle ANSI C-136.41-2013 EMR= EMR BATTERY GS= GLARE SHIELD PG= PRISMATIC GLASS WC=WIRELESS CONTROL

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: www.crystallighting.us

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA