
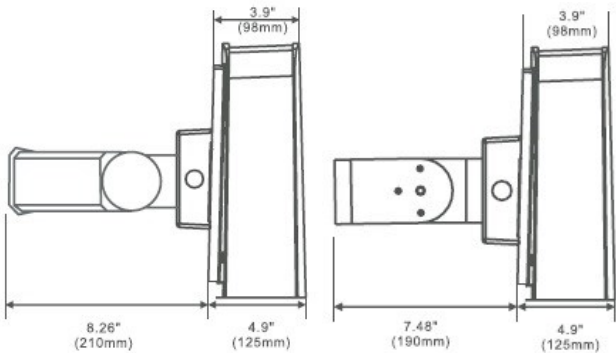


DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

LG-CLF-325FL

Architectural full cut off LED Flood light

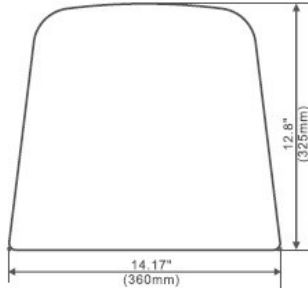

Architectural full cut off LED wall pack fixture can also be used as a flood light with optional mounts listed below, suitable for wet locations, Perfect for lighting up residential exteriors, walkways, entry ways, perimeters, parking garages, school campuses, industrial/commercial spaces. This fixture has a wide rectangular light distribution. Dark sky compliant and DLC listed. Comes with a 5 year/50,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell capable (optional)
- Operating Life: >60,000 hours

CONSTRUCTION

- Housing is heavy-duty die-cast aluminum
- 1/2" Coin plugs with O-rings for conduit, sensors or photo cell
- Powder coat **bronze finish (standard)** various colors available (custom).
- Clear polycarbonate lens
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Small yoke mount, Slip fitter mount and surface mount

OPTIONS

- (PC) Button photo cell
- (WC) Wireless Controls
- (SY) Small Yoke
- (SF) Slip fitter



Model Number	INPUT POWER	Delivered Lumens	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent	DLC LISTED
LG-CLF-325FL-88LED	88W	7,152	11,443	5000K	70+	>200,000	120-277V	50/60HZ	250w PSMH	YES
LG-CLF-325FL-150LED	150W	11,983	19,172	5000K	70+	>200,000	120-277V	50/60HZ	400w MH	YES

Ordering Guide

Example: (LG-CLF-325FL-88LED-50-MV-BZ-WC)

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
LG-CLF-325FL	88W-88LED 150W-150LED	40-4000K 50-5000K	MV=120-277V 480-480V	BZ- BRONZE GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM	PC- BUTTON PHOTO CELL WC- WIRELESS CONTROL SY- Small Yoke SF- Slip fitter