

DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

## SM-CLP-336FAL

## Small Architectural LED area light fixture


Architectural LED area light fixture, suitable for wet locations. Perfect for lighting up residential exteriors, walkways, entry ways, perimeters, storage areas, school campuses, Industrial/commercial spaces, parking lots, recreational parks. This fixture has a wide light distribution. Comes with a 5 year/50,000 hour limited warranty.

### FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >60,000 hours

### CONSTRUCTION

- Housing is heavy-duty die-cast aluminum & hinged front door frame.
- 1/2" Coin plugs with O-rings for conduit, sensors or photo cell
- Powder coat bronze finish (standard) various colors available (custom).
- Clear glass lens standard, prismatic glass lens optional
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Mounts directly onto a flat poles, optional round pole or wall mount adapters available

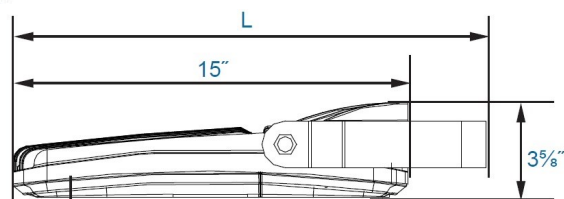

Length with mount (L):  
 Bracket (BR): 18 3/4"  
 Yoke (Y): 18"  
 Slipfitter (SF): 18 3/4"  
 Mounting Arm Adaptor: 19 1/8"

### OPTIONS

- OCC Motion sensor
- PC Button photo cell
- EMR Emergency battery backup
- GS Glare shield
- WC Wireless controls
- PG Prismatic glass
- (AEA) Adjustable extruded arm
- (EA6) 6" extruded arm
- (EA10) 10" extruded arm
- (EA12) 12" extruded arm
- (EA18) 18" extruded arm
- (SF) slip fitter
- (SB) Swivel Bracket
- (EAWM) extruded arm wall mount



Model Number	INPUT POWER	LUMEN OUTPUT	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
SM-CLP-336FAL-50CLED	55W	6,880	11,008	5000K	70+	>200,000	120-277V	50/60HZ	250w MH
SM-CLP-336FAL-75CLED	80W	9,590	15,344	5000K	70+	>200,000	120-277V	50/60HZ	250w PSMH
SM-CLP-336FAL-80CLED	85W	11,008	17,615	5000K	70+	>200,000	120-277V	50/60HZ	250w HPS
SM-CLP-336FAL-100CLED	105W	13,760	22,704	5000K	70+	>200,000	120-277V	50/60HZ	400w PSMH
SM-CLP-336FAL-120CLED	125w	15,344	24,550	5000K	70+	>200,000	120-277V	50/60HZ	400w HPS

### Ordering Guide

Example: (SM-CLP-336FAL-120CLED-50-MV-BZ-WC)

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
SM-CLP-336FAL	50W-50CLED	27-2700K	MV=120-277V	BZ- BRONZE	OCC- MOTION SENSOR
	75W-75CLED	30-3000K	480-480V	GRY-GRAY	PC- BUTTON PHOTO CELL
	80W-80CLED	35-3500K		BLK-BLACK	EMR- EMR BATTERY
	100W-100CLED	40-4000K		WH- WHITE	GS- GLARE SHIELD
	120W-120CLED	50-5000K		CUS-CUSTOM	PG- PRISMATIC GLASS
		57-5700K			WC- WIRELESS CONTROL
		65-6500K			