



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

## SM-CLP-BELL

### Small architectural LED area light fixture


Small architectural LED area light fixture, suitable for wet locations. Perfect for lighting up residential exteriors, walkways, perimeters, school campuses, Industrial/commercial spaces, parking lots, recreational parks. This fixture has a wide light distribution. Dark sky compliant Comes with a 5 year/50,000 hour limited warranty.

#### FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >60,000 hours

#### CONSTRUCTION

- Housing is heavy-duty die-cast aluminum & spun aluminum materials
- Powder coat bronze finish (standard) various colors available (custom).
- Clear glass lens standard, prismatic glass lens optional
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Comes ready to mount on top of a 4" round pole as a single (standard), double, triple or quad heads.

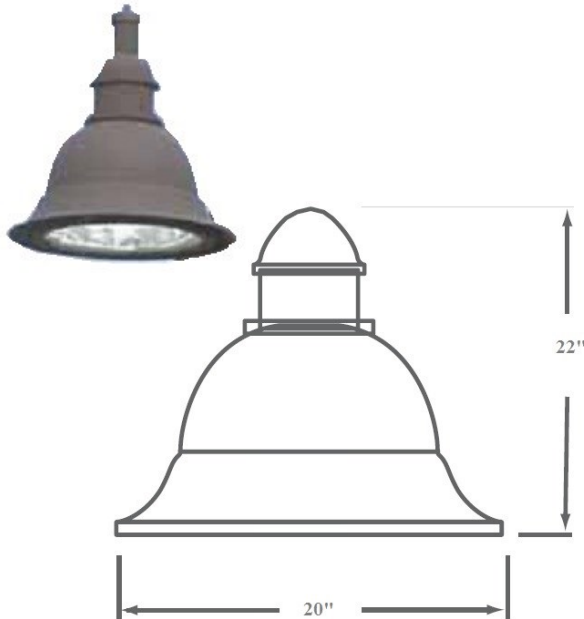

#### OPTIONS

- (OCC) Motion sensor
- (PC) Button photo cell
- (WC) Wireless controls
- (PG) Prismatic glass



Model Number	INPUT POWER	LUMEN OUTPUT	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
SM-CLP-BELL-25CLED	30W	3,785	6,056	5000K	70+	>200,000	120-277V	50/60HZ	150w PSMH
SM-CLP-BELL-35CLED	40W	5,170	8,272	5000K	70+	>200,000	120-277V	50/60HZ	175w HPS
SM-CLP-BELL-50CLED	55W	6,880	11,008	5000K	70+	>200,000	120-277V	50/60HZ	250w MH
SM-CLP-BELL-75CLED	80W	9,590	15,344	5000K	70+	>200,000	120-277V	50/60HZ	250w HPS

#### Ordering Guide

Example: (SM-CLP-BELL-35CLED-50-MV-BZ-WC)

SM-CLP-BELL	MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
SM-CLP-BELL	25W-25CLED 35W-35CLED 50W-50CLED 75W-75CLED	27-2700K 30-3000K 35-3500K 40-4000K <b>50-5000K</b> 57-5700K 65-6500K	MV=120-277V 480-480V	BZ- BRONZE GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM	OCC- MOTION SENSOR PC- BUTTON PHOTO CELL PG- PRISMATIC GLASS WC- WIRELESS CONTROL	

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: [www.crystallighting.us](http://www.crystallighting.us)

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA