



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

## SM/MD/LG-VL-2228

## LED Interior Ceiling Mount



The **VL-2228** displays a simple yet sophisticated look. This fixture is ideal for ceiling and wall mount applications; some locations include: residential, institutional, and multifamily locations. Compared to fluorescent lights, the **VL-2228** is more energy efficient, durable, and low maintenance. This fixture works best in dry locations. The **VL-2228** fixture offers competitive pricing and includes a 3 year warranty.

### FEATURES

- Starting Temperature: -30°C ~ 60°C
- Suitable for dry locations
- 4000K
- 120V
- Operating life: >50,000 hours
- 3 year warranty



### CONSTRUCTION

- High gauge and steel housing
- Twist and lock installation for diffuser
- White finish (standard)

MODEL #	INPUT POWER	LUMEN OUTPUT	SCOTOPIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY
SM-VL-2228-14LED	14W	1,200	1,980	4000K	80	>50,000	120V	50/60 Hz
MD-VL-2228-20LED	20W	1,660	2,739	4000K	80	>50,000	120V	50/60 Hz
LG-VL-2228-35LED	35W	2,900	4,785	4000K	80	>50,000	120V	50/60 Hz

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: [www.crystallighting.us](http://www.crystallighting.us)

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA


# Ordering Guide

**Example: MD-VL-2228-20LED-40-120V-NIC**

SM/LG-VL-2228				
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH
SM-VL-2228-14LED	14W-14LED	40-4000K	120V	WH-WHITE
<b>MD-VL-2228-20LED</b>	<b>20W-20LED</b>	<b>40-4000K</b>	<b>120V</b>	<b>WH-WHITE</b>
LG-VL-2228-35LED	35W-35LED	40-4000K	120V	WH-WHITE

## Dimensions

SM-VL-2228-14LED

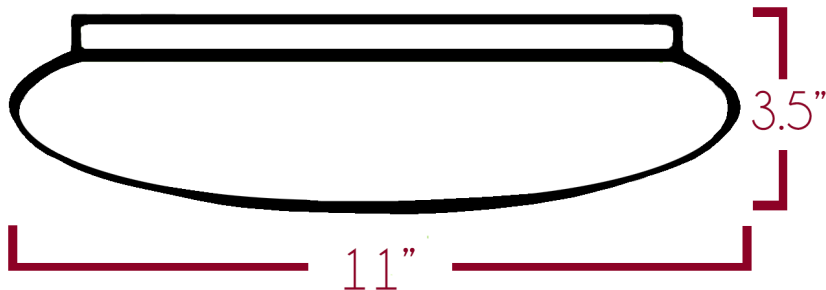

MD-VL-2228-14LED



LG-VL-2228-14LED

