



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

**VL-2'x 2'**

**LED Panel Light**



**FEATURES**

- Energy savings of 60% compared to traditional fluorescent lamps
- DLC approved
- Silent; flicker-free
- IP20
- Suitable for temperature: -14 ~ 104° F
- 4000K or 5000K
- 100~277V
- 5 year warranty

**CONSTRUCTION**

- Aluminum frame
- White finish
- Mounting: recessed mount, suspended mount (optional)




MODEL #	INPUT POWER	LUMEN OUTPUT	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY
VL-2' x 2'-36LED	36W	4,500	4000K 5000K	80	>50,000	100-277V	50/60 Hz

# Ordering Guide

**Example: VL-2' x 2'-36LED-40-100~277V-WH-RecessedMount**

VL-2' x 2'					
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
VL-2' x 2'	36W-36LED	40-4000K 50-5000K	100-277V	WH-WHITE	Recessed Mount Suspended Mount DIMM-Dimmable

# Dimensions

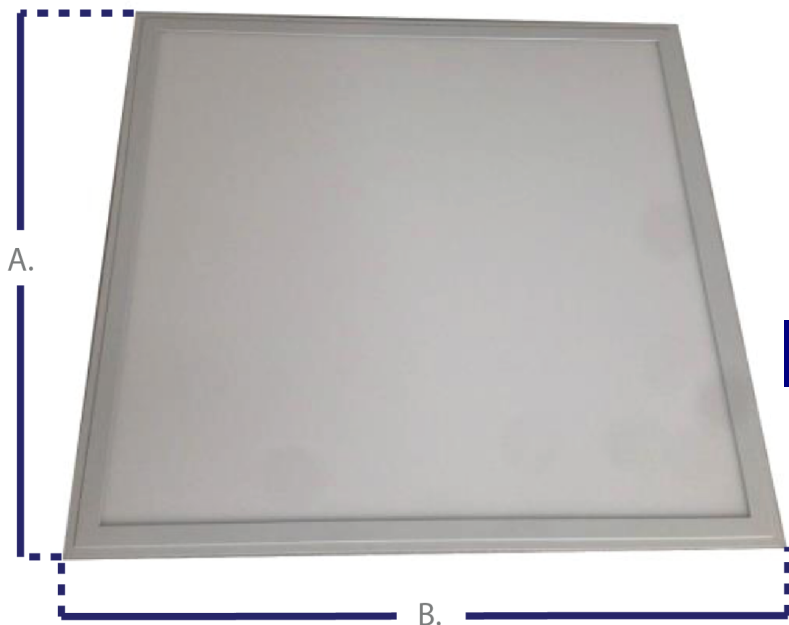

	A.	B.	Thickness
VL-2' x 2'	2.37"	2.37"	1.8"