



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

SM/MD/LG/XLG-VL-3051

LED Interior Ceiling Mount

The **VL-3051** displays a simple yet sophisticated look. This fixture is ideal for ceiling and wall mount applications; some locations include: residential, institutional, and multifamily locations. Compared to fluorescent lights, the **VL-3051** is more energy efficient, durable, and low maintenance. This fixture works best in dry locations. The **VL-3051** fixture offers competitive pricing and includes a 3 year warranty.



FEATURES

- Starting Temperature: -30°C ~ 60°C
- Suitable for dry locations
- 3000K, 4000K (standard)
- 120V
- Operating life: >50,000 hours
- 3 year warranty



CONSTRUCTION

- Steel housing
- White diffuser
- Nickel finish (standard)

MODEL #	INPUT POWER	LUMEN OUTPUT	SCOTOPIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY
SM-VL-3051-14LED	14W	1,200	1,980	3000K 4000K	80	>50,000	120V	50/60 Hz
MD-VL-3051-20LED	20W	1,660	2,739	3000K 4000K	80	>50,000	120V	50/60 Hz
LG-VL-3051-35LED	35W	2,900	4,785	3000K 4000K	80	>50,000	120V	50/60 Hz
XLG-VL-3051-70LED	70W	5,800	9,570	3000K 4000K	80	>50,000	120V	50/60 Hz

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: www.crystallighting.us

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA


Ordering Guide

Example: MD-VL-3051-20LED-40-120V-NIC


SM/MD/LG/XLG-VL-3051				
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH
SM-VL-3051-14LED	14W-14LED	30-000K 40-4000K	120V	NKL- NICKEL
MD-VL-3051-20LED	20W-20LED	30-000K 40-4000K	120V	NKL- NICKEL
LG-VL-3051-35LED	35W-35LED	30-000K 40-4000K	120V	NKL- NICKEL
XLG-VL-3051-70LED	70W-70LED	30-000K 40-4000K	120V	NKL- NICKEL

Dimensions


SM-VL-3051-14LED

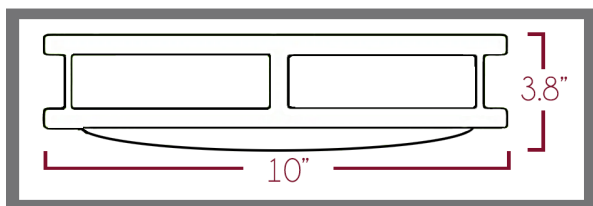

MD-VL-3051-20LED

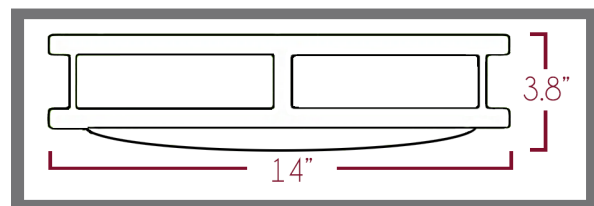

LG-VL-3051-35LED

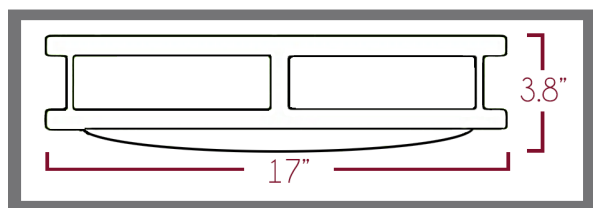

XLG-VL-3051-70LED

