



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

VL-495

LED Low Profile Wall Pack



The **VL-495** is available in two different sizes and in three different wattages to best fit your needs. The **VL-495** is ideal for locations such as exterior walls, parking areas, entrances, walkways, flat surfaces, and any other outdoor setting that is looking to create a well-illuminated atmosphere. This fixture is also designed to tolerate wet locations. For your convenience, we have included a 5 year warranty along with your investment.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Operating Temperatures: -34°C ~ 54°C
- Driver: Constant current, 120-277v, 50/60Hz
- Suitable for wet locations
- Dimming (optional)
- Operating life: >100,000 hours

CONSTRUCTION

- Housing is heavy-duty die-cast aluminum
- Powder coat black finish (standard)
- Silicone gasket to prevent leakage and provide weather-tight protection

OPTIONS

- DIMM- Dimmable

MODEL #	INPUT POWER	LUMEN OUTPUT	SCOTOPIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY
VL-SM-495-24LED	24W	2,640	4,356	5000K	70+	>100,000	120-277v	50/60Hz
VL-MD-495-80LED	80W	8,800	14,520	5000K	70+	>100,000	120-277v	50/60Hz
VL-MD-495-100LED	100W	11,000	18,150	5000K	70+	>100,000	120-277v	50/60Hz

Ordering Guide

 Example: VL-SM-495-24LED-50-MV-BLK-DIMM

VL-495					
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
VL-SM-495	24W-24LED	50-5000K	MV=120-277V	STANDARD: BLK-BLACK	DIMM-DIMMABLE



Ordering Guide

 Example: VL-MD-495-80LED-50-MV-BLK-DIMM

VL-495					
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
VL-MD-495	80W-80LED 100W-100LED	50-5000K	MV=120-277V	STANDARD: BLK-BLACK	DIMM-DIMMABLE

DIMENSIONS

24W Dimensions

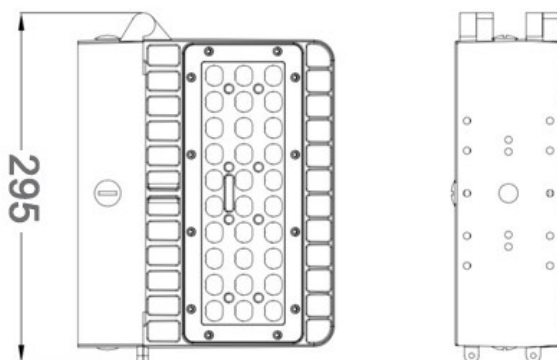

80W & 100W Dimensions

