




DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

VL-530FAL

LED Area Light

The energy efficient LED light fixture, **VL-530FAL** is durable, reliant and provides powerful luminosity. It is ideal for: car dealerships, parking garages, school campuses, industrial/commercial spaces, and recreational parks. The **VL-530FAL** offers competitive pricing and includes a 3 year warranty.

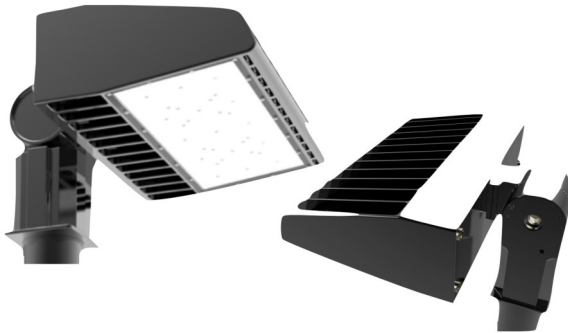

FEATURES

- Ambient temperature: -34.4°C ~ 48.9°C
- CRI: 70+
- UL & CUL listed for wet locations
- IP rating: IP65
- Driver: Constant current, 120-277V
- Operating life: >100,000 hours

OPTIONS

- (PM) Pole mount
- (SF) Slip fitter

CONSTRUCTION

- Die-cast aluminum body
- Polycarbonate lens
- Powder coat black finish (standard)



POLE MOUNT



SLIP FITTER

MODEL #	INPUT POWER	LUMEN OUTPUT	SCOTOPIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID EQUIVALENT
VL-530FAL-35LED	35W	4,900	8,085	5000K	70+	>100,000	120-277V	50/60Hz	175w MH
VL-530FAL-50LED	50W	7,000	11,500	5000K	70+	>100,000	120-277V	50/60Hz	250w MH
VL-530FAL-80LED	80W	11,200	18,480	5000K	70+	>100,000	120-277V	50/60Hz	375w MH
VL-530FAL-100LED	100W	14,000	23,100	5000K	70+	>100,000	120-277V	50/60Hz	500w MH
VL-530FAL-120LED	120W	16,800	27,720	5000K	70+	>100,000	120-277V	50/60Hz	600w MH
VL-530FAL-150LED	150W	21,000	34,650	5000K	70+	>100,000	120-277V	50/60Hz	750w MH

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: www.crystallighting.us

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA

Ordering Guide

Example: VL-530FAL-50LED-50-MV-BLK-PM

VL-530FAL					
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
VL-530FAL	35W-35LED 50W-50LED 80W-80LED 100W-100LED 120W-120LED 150W-150LED	50-5000K	MV=120-277V	BLK-BLACK	<u>Add'l Cost:</u> (PM) POLE MOUNT (SF) SLIP FITTER

Dimensions

