




DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

VL-CLB-B1C3

Round LED Bollard

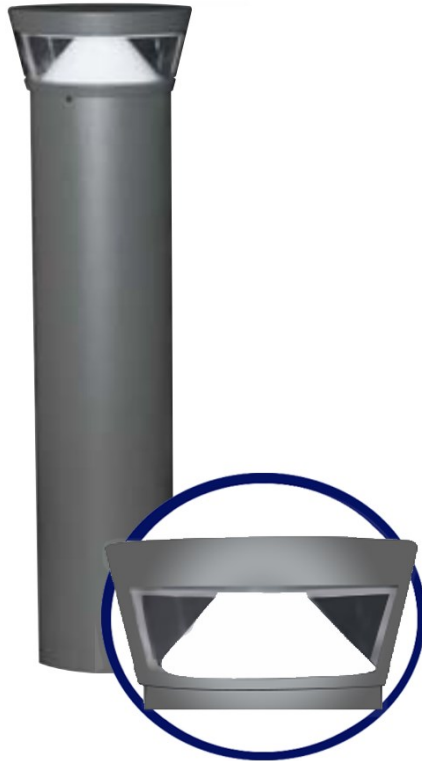

The energy efficient LED bollard, **VL-CLB-B1C3** is durable, reliant and provides powerful luminosity. This aluminum bollard is constructed with a flush mounting base. It is ideal for: walkways, driveways, school campuses, industrial/commercial spaces, and recreational parks. The **VL-CLB-B1C3** offers competitive pricing and includes a 5 year warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- -34.4°C ~ 49°C
- Driver: MV—120~277V or 347V, 50/60HZ
- IP67 suitable for wet locations
- Operating life: >50,000 hours
- 5 year warranty

CONSTRUCTION

- Aluminum housing with flush mounting base
- Vandal-resistant screws
- Flat top
- Black or bronze finish (standard) ; other finishes available (custom)

MODEL #	INPUT POWER	LUMEN OUTPUT	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY
VL-B1C3-20LED	20W	2,282	3,765	4100K	80+	>50,000	120~277V	50/60Hz

Ordering Guide

Example: VL-B1C3-20LED-41-MV-BZ

VL-B1C3				
MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH
VL-B1C3	20W-20LED	41-4100K	MV—120~277V 347— 347V	BZ-BRONZE BLK-BLACK CUS-CUSTOM

Dimensions

