



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

VL-FLIS

LED Floodlight

The VL-FLIS ensures strong luminosity. It is also durable, reliable and is available in 5 different wattages. A few ideal locations for the VL-FLIS are: parking areas, entrances, walkways, underpasses and roadways. The VL-FLIS offers competitive pricing and includes a 3 year warranty.



FEATURES

- Starting Temperature: -34.4°C ~ 48.9°C
- UL & CUL listed for wet locations
- DL listed
- Driver: Constant current, 120V
- Operating life: >100,000 hours
- 3 year warranty

CONSTRUCTION

- Solid construction die-cast aluminum body
- Powder coat bronze finish (standard)
- Glass lens





MODEL #	INPUT POWER	LUMEN OUTPUT	SCOTOPIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID EQUIVALENT
VL-FLIS-40LED	40W	4,800	7,920	5000K	70+	>100,000	120 ~ 277V	50/60Hz	150W MH
VL-FLIS-60LED	60W	7,200	11,880	5000K	70+	>100,000	120 ~ 277V	50/60Hz	200W MH
VL-FLIS-90LED	90W	10,800	17,820	5000K	70+	>100,000	120 ~ 277V	50/60Hz	320W MH
VL-FLIS-120LED	120W	14,400	23,760	5000K	70+	>100,000	120 ~ 277V	50/60Hz	480W MH
VL-FLIS-150LED	150W	18,000	29,700	5000K	70+	>100,000	120 ~ 277V	50/60Hz	600W MH

Ordering Guide


Example: VL-FLIS-60LED-50-MV-BZ

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH
VL-FLIS	40W-40LED 60W-60LED 90W-90LED 120W-120LED 150W-150LED	50-5000K	MV=120-277V	BZ- BRONZE


Dimensions

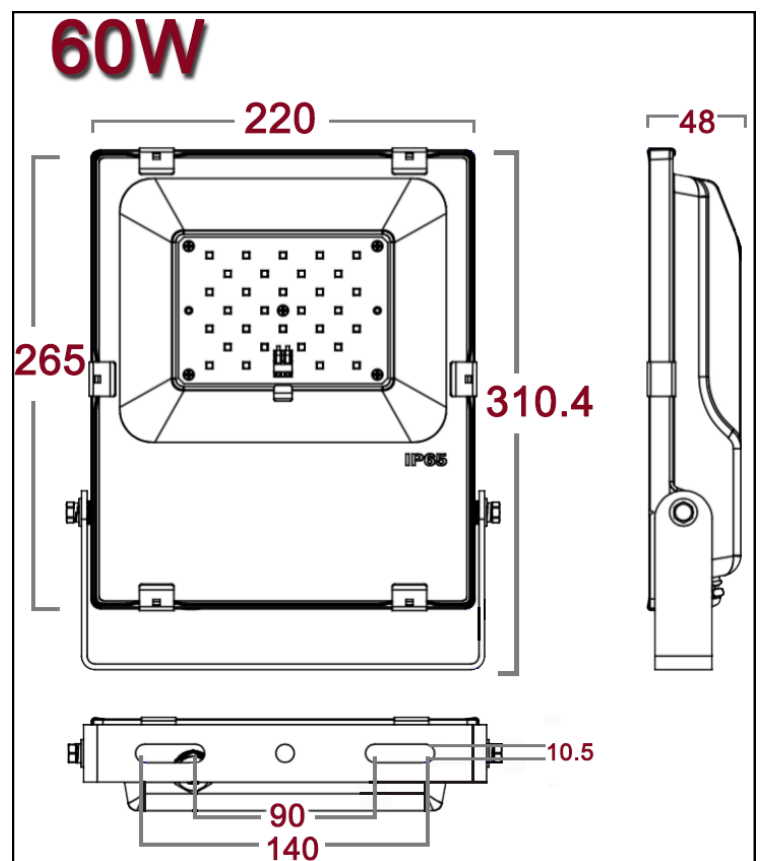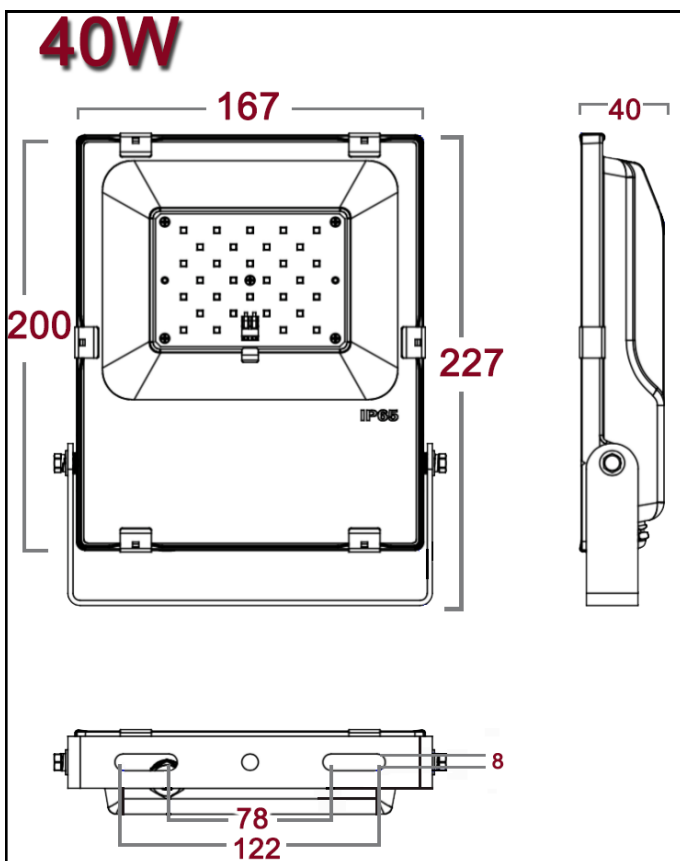

90W

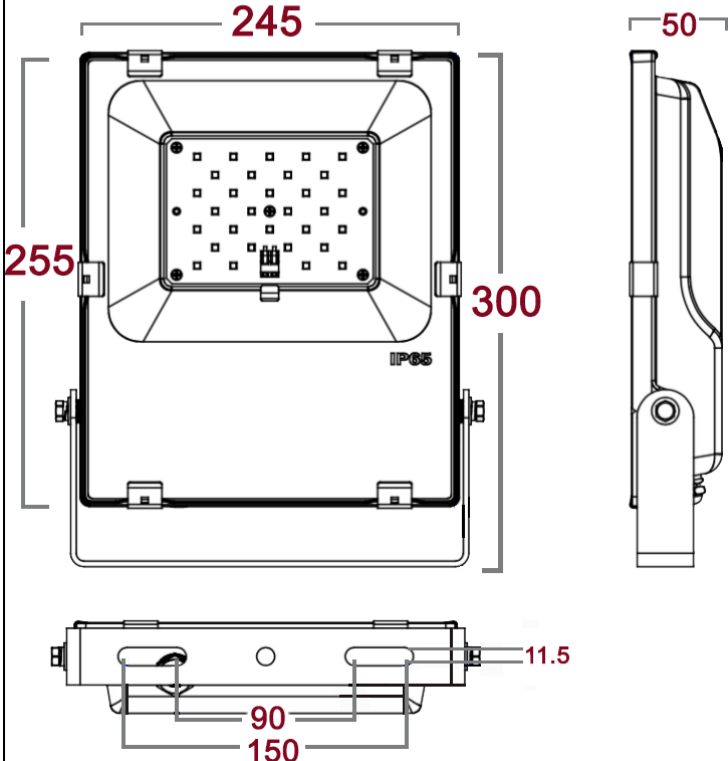

120W

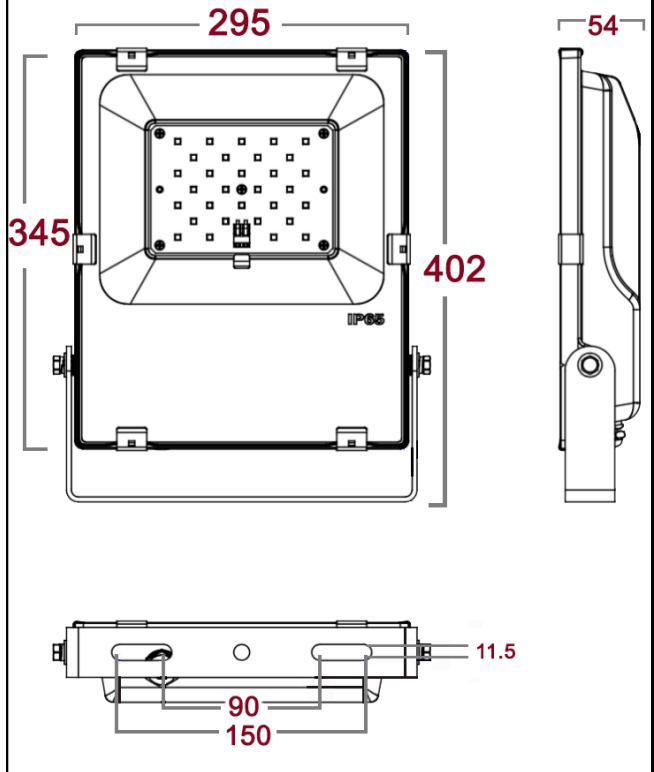

150W

