



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

## VL-SM55DL / VL-SM7DL

## Round LED Surface Light



\*not shown in nickel finish

This cut sheet exhibits two surface lights—the **VL-SM55DL**; and the **VL-SM7DL**. These surface mounted luminaires are constructed with the same sleek low profile design. However, they are given two separate item numbers due to difference in sizes.

These surface light fixtures are energy efficient, low in maintenance, and have a simple installation process. They are ideal for flush mount applications. For instance, some locations include: residential, institutional, commercial and multi-family locations. They are also suitable for wet locations. The **VL-SM55DL** and the **VL-SM7DL** offer competitive pricing and include a 5 year warranty.

### FEATURES

- Starting Temperature: -30°C ~ 60°C
- Wet location rated
- 3000K
- 120V
- 90 CRI
- Operating life: >50,000 hours
- 5 year warranty
- Dimmable



### CONSTRUCTION

- Acrylic lens
- Metal housing and rings
- White translucent diffuser
- Nickel finish (standard)

MODEL #	INPUT POWER	LUMEN OUTPUT	SCOTOPIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY
VL-SM55DL-12LED	12W	660	1,089	3000K	90	>50,000	120V	50/60 Hz
VL-SM7DL-15LED	15W	850	1,403	3000K	90	>50,000	120V	50/60 Hz


# Ordering Guide

Example: VL-SM55DL-15LED-30-120V-NKL

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH
VL-SM55DL	12W-12LED	30-3000K	120V	NKL-NICKEL
VL-SM7DL	15W-15LED			WH-WHITE

# Dimensions

VL-SM55DL

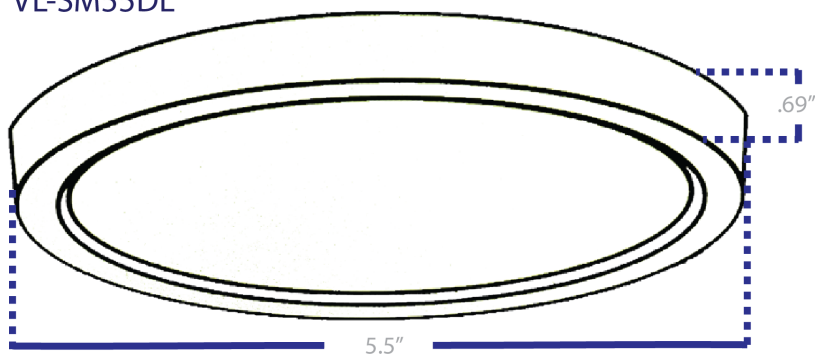

VL-SM7DL

