



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

MD-CLW-3032

Medium LED Flood light

Medium LED Flood light fixture, suitable for wet locations, Perfect for lighting up commercial landscape, walkways, entry ways, perimeters, school campuses, industrial/commercial spaces, sign lighter. This fixture has a wide rectangular light distribution. Comes with a 5 year/50,000 hour limited warranty.

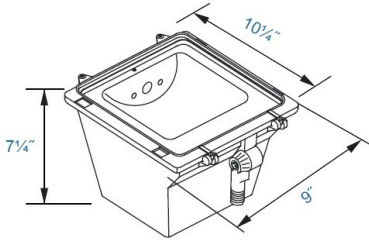

OPTIONS

- (PC) Button photo cell
- (WG) Wire guard stainless steel
- (GS) Glare shield
- (SF) Slip fitter
- (WC) Wireless Control
- (FLSTK) Ground Stake
- (PTF) Post top fitter

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell capable (optional)
- Operating Life: >60,000 hours

CONSTRUCTION

- Housing is heavy-duty die-cast aluminum
- 1/2" Coin plugs with O-rings for conduit, sensors or photo cell
- Powder coat **bronze finish (standard)** various colors available (custom).
- Clear tempered glass lens
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box or use 1/2" Surface Conduit

DESIGNLIGHTS
CONSORTIUM

NEMA

Wireless Controls
Available



PHILIPS
LUMILEDS

Buy American Compliant

Model Number	INPUT POWER	LUMEN OUTPUT	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent	DLC Listed
MD-CLW-3032-5CLED	7W	757	1,211	5000K	70+	>200,000	120-277V	50/60HZ	35w HPS	No
MD-CLW-3032-10CLED	12W	1,376	2,201	5000K	70+	>200,000	120-277V	50/60HZ	50w HPS	No
MD-CLW-3032-15CLED	20W	1,918	3,068	5000K	70+	>200,000	120-277V	50/60HZ	70w HPS	No
MD-CLW-3032-36LED	40W	3,187	5,099	4000K	60+	>200,000	120-277V	50/60HZ	100w HPS	Yes
MD-CLW-3032-40CLED	45W	5,504	8,806	5000K	70+	>200,000	120-277V	50/60HZ	150w HPS	No

Ordering Guide

Example: (MD-CLW-3032-40CLED-50-MV-BZ-SF)

MD-CLW-3032	MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
MD-CLW-3032	MD-CLW-3032	5W-5CLED 10W-10CLED 15W-15CLED 36W-36LED 40W-40CLED	27-2700K 30-3000K 35-3500K 40-4000K 50-5000K 57-5700K 65-6500K	MV=120-277V 480-480V	BZ- BRONZE GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM	PC- BUTTON PHOTOCELL WG- WIRE GUARD GS- GLARE SHIELD SF- SLIP FITTER FLSTK- GROUND STAKE PTF- POST TOP FITTER WC- WIRELESS CONTROL

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: www.crystallighting.us

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA