

CL-NV3031 Architectural Full Cut Off LED Wall Pack Luminaire, Perfect for lighting up Residential Exteriors, Walkways, Entry Ways, Perimeters, Parking Garages, School Campuses, and others Industrial or Commercial Spaces. CL-NV3031 is 100% manufactured in the USA.

- Dark sky compliant and up light option.
- Ten year/100,000 hour limited warranty.

Features

•ADA Compliant.

Energy Savings: Over 66% compared to HID light sources


- Improved lumen maintenance
- Utilizes high efficient Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz.
- Suitable for wet locations
- 0-10 Dimming Driver, Occupancy Sensors or PhotoCell (optional)

Construction


- Housing is heavy-Gauge Aluminum
- 3 Mil Powder Coat Finish.
- Frosted Acrylic Lens (Standard)
- Silicone Gasket to prevent leakage and provide weather-tight protection.
- Mounting: Over 4" "J" Box.



OPTIC DISTRIBUTION



TYPE 4 (T4)




TYPE 5 (T5)

Example: CL-NV3031-20CLED-T5-40K-MV-BZ-PC



Cat #	Wattage	Light Dist.	Color Temp.	Voltage	Finish	Options
CL-NV3031	10W (10CLED)	Type 4 (T4)	3000K (30K)	120-277V (MV)	Black (BLK)	Button Photo Cell (PC)
	15W (15CLED)	Type 5 (T5)	4000K (40K)		White (WHT)	Wireless controls (WC)
	20W (20CLED)		5000K (50K)		Silver (SLR)	Emergency Pack (EMR)
					Bronze (BRZ)	
					Graphite (GPH)	
					Custom (CST)	

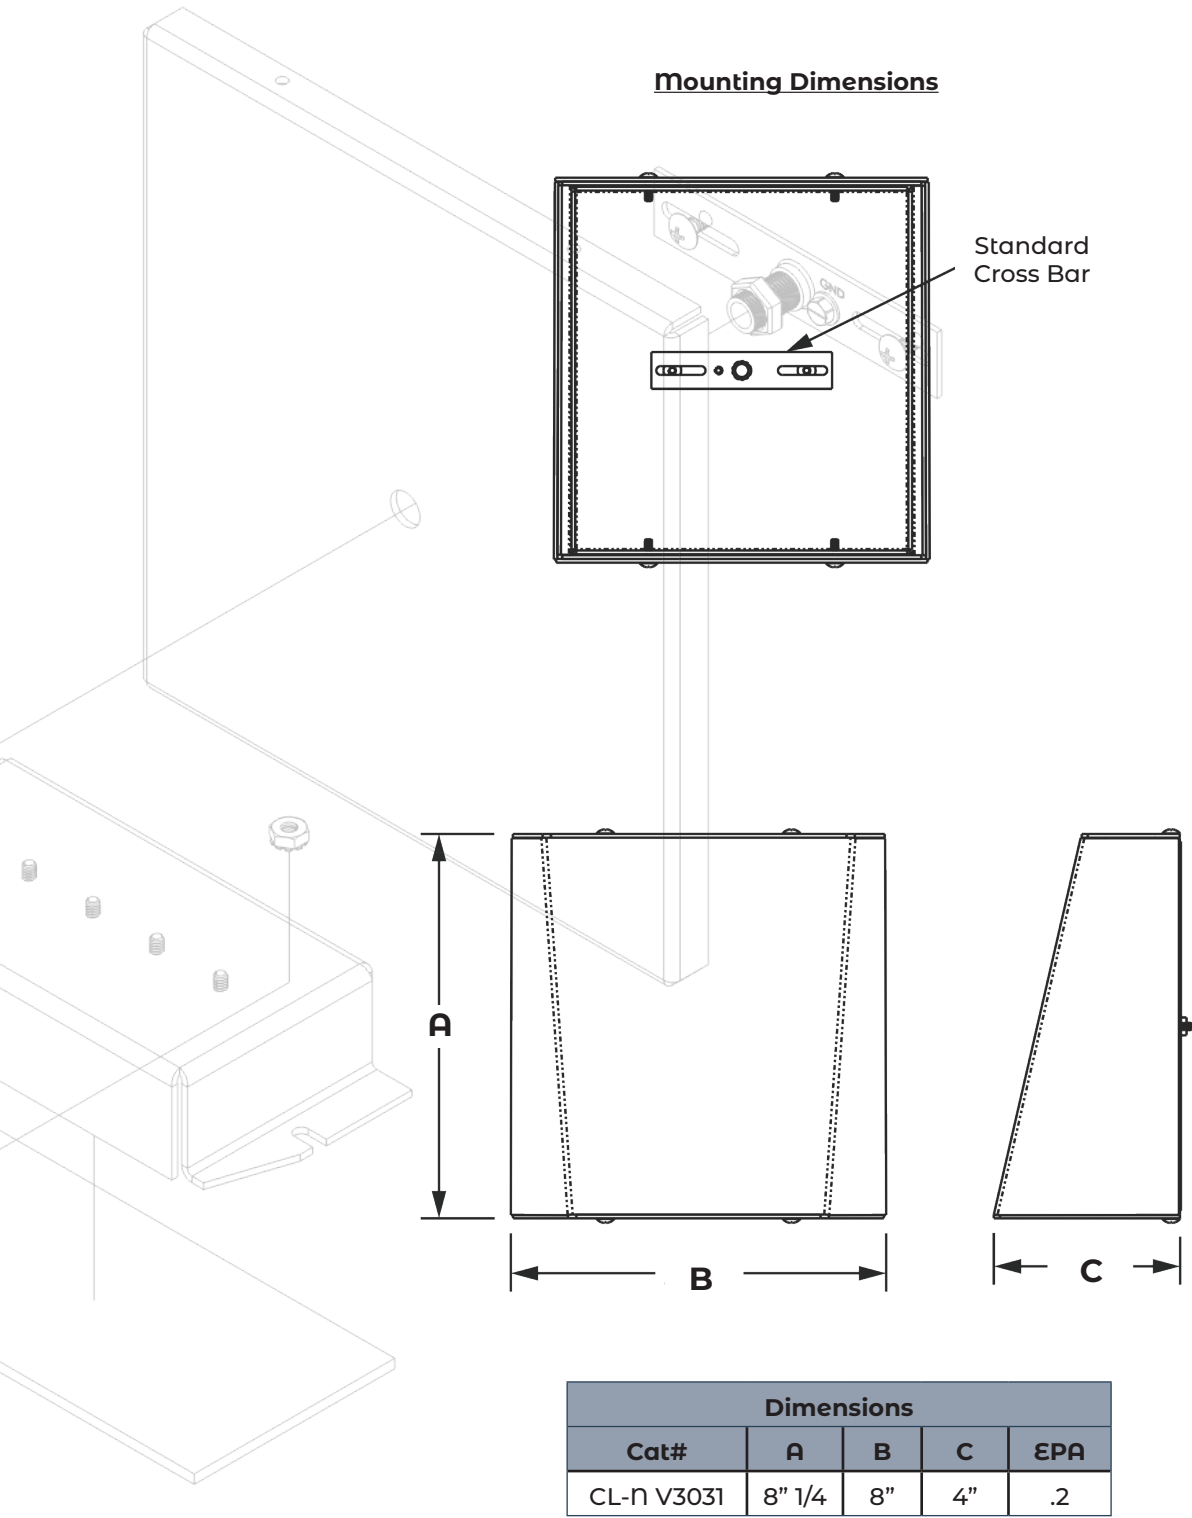

Cat #	Input Power	Lumen Output	LPW	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage	HID Equivalent
CL-NV3031-10CLED	15W	1,914	191	5000K	70+	>200,000	120-277V	50W HPS
CL-NV3031-15CLED	20W	2,754	193	5000K	70+	>200,000	120-277V	70W HPS
CL-NV3031-20CLED	25W	2,935	146	5000K	70+	>200,000	120-277V	100W HPS