



ACRN-LRET Designed to Retrofit HID ACORN Luminaires for Campuses, Parks and Retail Applications. ACRN-LRET Can be mounted below the HID reflector to provide full cutoff
 -10 Year / 100, 000hrs Limited warranty

Construction:


- Aluminum 6063 for best thermal dissipation
- 3 mil Powder Coating (White)

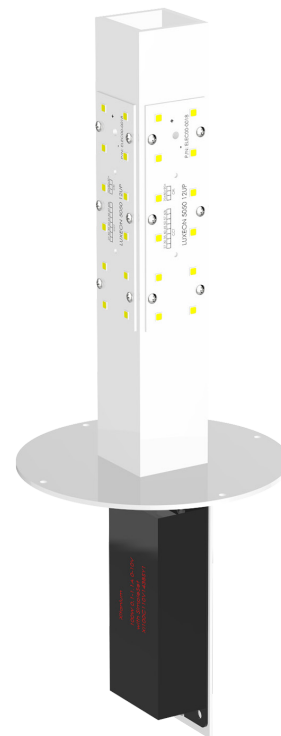

Optic Distribution.



Type 3 (T3)




Type 5 (T5)



Example: ACRN-LRET-20CLED-T5-40K-MV-WH-WA

ACRN-LRET						
Cat #	Wattage	DISTRIBUTION	Color Temp.	Voltage	Color	Options
ACRN-LRET	20W (20CLED) 40W (40CLED) 60W (60CLED) 80W (80CLED)	TYPE 3 (T3) TYPE 5 (T5)	3000K (30K) 4000K (40K) 5000K (50K)	120-277V (MV)	White (WH)	Wattage Adjuster (WA)

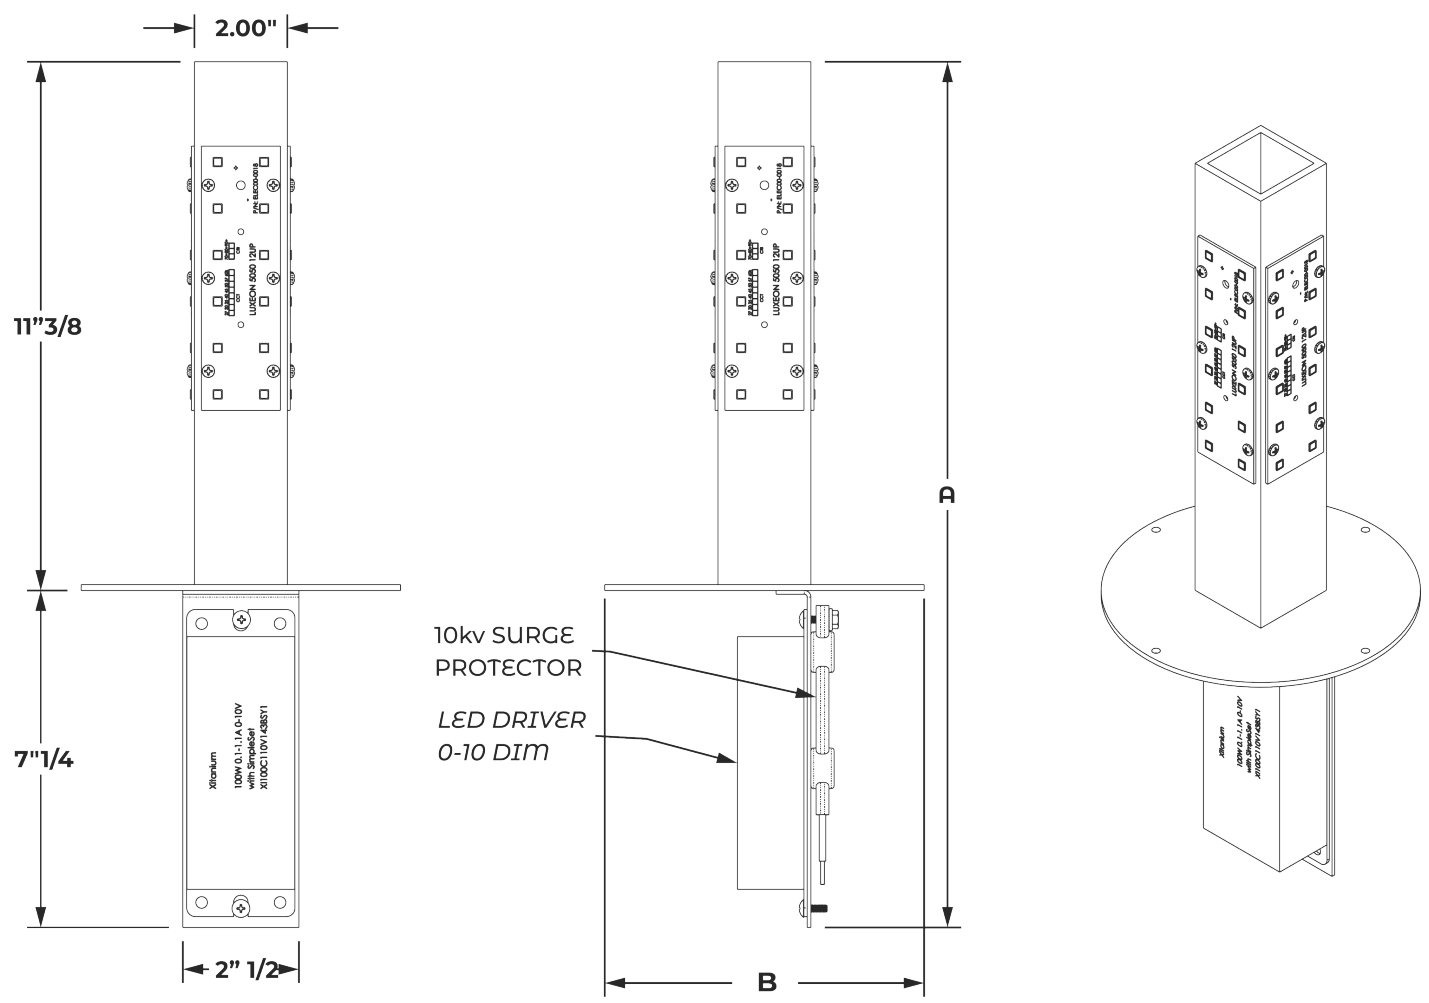

Dimensions			
Cat#	A	B	C
ACRN-LRET	18" 5/8	6" 7/8	

Cat #	Input Power	Lumen Output	LPW	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage	HID Equivalent	HID Equivalent
ACRN-LRET-20CLED	25W	3,650	182	5000K	70+	>200,000	120-277V	50/60HZ	70W MH
ACRN-LRET-40CLED	45W	6,492	162	5000K	70+	>200,000	120-277V	50/60HZ	100W HPS
ACRN-LRET-60CLED	65W	8,539	142	5000K	70+	>200,000	120-277V	50/60HZ	100W PSMH
ACRN-LRET-80CLED	85W	10,841	135	5000K	70+	>200,000	120-277V	50/60HZ	150W HPS

Proudly Manufactured and Assembled in the USA