

CLP-3075 Series  
LED Area Fixture  
DESIGN - QUALITY-FUNCTION



Crystal   
Lighting

# CLP-3075 Area LED Fixture

CLP-3075 LED Area LED fixture, suitable for wet locations. Perfect for lighting up residential exteriors, walkways, entry ways, perimeters, storage areas, parking garages, school campuses, Industrial/commercial spaces, wall washer, parking lots, recreational parks. This fixture has a wide light distribution. Comes with a 10 year/100,000 hour limited warranty.

## FEATURES


- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v or 480v (Optional)
- IP-66 Rated
- 0-10 Dimming, Occupancy Sensors, Photo Cell and Wireless Controls (Optional)
- 10Kv Surge Protector (Standard)
- Operating Life: >60,000 hours




## CONSTRUCTION.

- Housing is Heavy-Duty Spun Aluminum.
- 3 Mils Powder Coat Finish.
- Silicone Gasket to prevent leakage and provide weather-tight protection.
- Mounting: Arm Mount, Spider Mount, Yoke Mount. (SM and YM 3" O.D Standard)


## OPTIC DISTRIBUTION




**TYPE 2 (T2)**



**TYPE 3 (T3)**



**TYPE 4 (T4)**



**TYPE 5 (T5)**


Example: (CLP-3075-120CLED-50-MV-T5-BRZ-WC)





CAT#	Wattage	Light Dist.	Color Temp.	Voltage	Finish	Mounting	Options
CLP-3075	20W (20CLED)	TYPE 2 (T2)	3000K (30K)	120-277V (MV)	BLACK (BLK)	6" EXTRUDED ARM (EA6)	MOTION SENSOR (OCC)
	40W (40CLED)	TYPE 3 (T3)	4000K (40K)	377V (347)	WHITE (WH)	10" EXTRUDED ARM (EA10)	BUTTON PHOTO CELL (PC)
	60W (60CLED)	TYPE 4 (T4)	5000K (50K)	480V (480)	BRONZE (BRZ)	12" EXTRUDED ARM (EA12)	HOUSE SIDE SHIELD (HSS)
	80W (80CLED)	TYPE 5 (T5)			SILVER (SIL)	SPIDER MOUNT (SM)	WIRELESS CONTROL (WC)
	100W (100CLED)				GRAPHITE (GPH)	YOKE MOUNT (YM)	
	120W (120CLED)				MARINE GRADE (MG)	6" EXTRUDED ARM WALL MOUNT (6EAWM)	





ARM MOUNT



SPIDER MOUNT

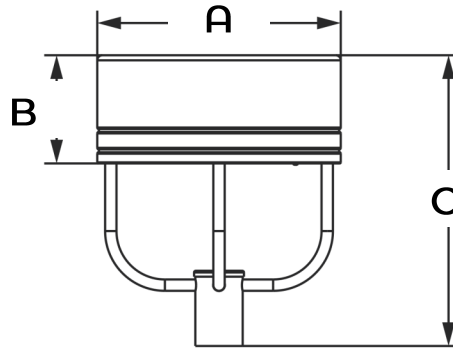

YOKE MOUNT

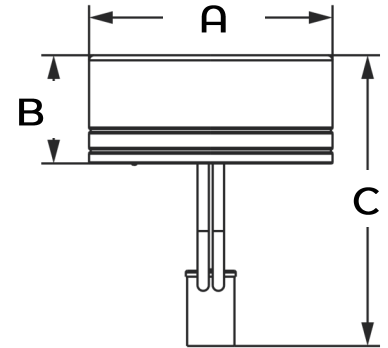

Shade Dimensions				EPA
CAT#	A	B	C	
CLP-3075-AM	18"	8"		1.16
CLP-3075-SM	18"	8"	21" 1/5	1.33
CLP-3075-YM	18"	8"	21" 1/5	1.22

CAT#:	INPUT POWER	LUMEN OUTPUT	LPW	COLOR-TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
CLP-3075	20CLED	3,650	182	5000K	70+	>200,000	120-277V	50/60HZ	35W MH
CLP-3075	40CLED	6,492	162	5000K	70+	>200,000	120-277V	50/60HZ	50W HPS
CLP-3075	60CLED	8,559	142	5000K	70+	>200,000	120-277V	50/60HZ	70W PSMH
CLP-3075	80CLED	12,714	158	5000K	70+	>200,000	120-277V	50/60HZ	150W HPS
CLP-3075	100CLED	14,265	142	5000K	70+	>200,000	120-277V	50/60HZ	150W HPS
CLP-3075	120CLED	17,118	142	5000K	70+	>200,000	120-277V	50/60HZ	250W HPS



**Crystal Lighting Corp.**  
13182 Flores St,  
Santa Fe Springs, CA 90670  
Ph: 562-944-0223  
Fax: 562-944-0225  
[www.crystallighting.us](http://www.crystallighting.us)

**All products are proudly manufactured and/or assembled in the USA**