



The CLH-RNG Architectural Luminaire, slim Profiles with Robust Construction. Lighting Solution for modern Offices, Public Areas, Libraries and other Indoor Spaces. CL-RNG is Available in 2', 3' and 4' OD. CL-RNG includes a White Cord along with Stainless Steel Aircraft Cables.
-10 Year Limited Warranty.

FEATURES

- Driver 120/277, 0-10v Dimming Driver.
- Available in 30K/80CRI Standard, 40K, 50K or 90CRI are Optional
- Lumileds Flex LED strip
- Suitable for damp locations
- White cord (included)
- Stainless Steel Adjustable Aircraft Cables


CONSTRUCTION

- Material: Aluminum Housing
- 3 Mills Powder Coating
- Frosted Acrylic Lens (standard)




Example: CL-RNG1-DL-10CLEd-30K-80CRI-MV-BLK-CBM4

Cat #	Strap Design	Wattage	Color Temp.	CRI	Voltage	Finish	Mounting
CL-RING 24" (CL-RNG1)	Down Light (DL)	10W (10CLEd)	3000K (30K)	80CRI (80CRI)	120-277V (MV)	Matte Black (MBLK) Glossy Black (GBLK) Texture Black (TBLK) Texture White (TWHT) Silver (SLR) Bronze (BRZ) Graphite (GPH) Copper Vein (CPV) Silver Vein (SLV) Oil Rubbed Bronze (ORB)	Aircraft Cable
CL-RING 36" (CL-RNG2)	Up Light (UL)	20W (20CLEd)	4000K (40K)	90CRI (90CRI)			CBM 4' (CBM2)
CL-RING 48" (CL-RNG3)	UP& Down- Light (UDL)	30W (30CLEd) 40W (40CLEd) 50W (50CLEd) 60W (60CLEd)	5000K (50K)				CBM 6' (CBM3) Custom (CST)

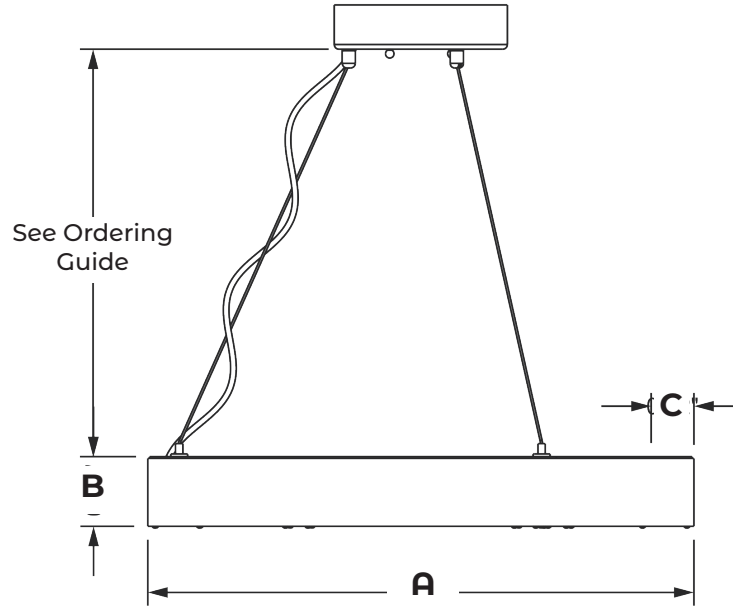

CL-RNG UP OR DOWN LIGHT			
Cat#	A	B	C
CL-RNG1 UL/DL	24"	2"	2"
CL-RNG2 UL/DL	36"	2"	2"
CL-RNG3UL/DL	48"	2"	2"

CL-RNG UP & DOWN LIGHT			
Cat#	A	B	C
CL-RNG1 UDL	24"	3"	2"
CL-RNG2 UDL	36"	3"	2"
CL-RNG3 UDL	48"	3"	2"

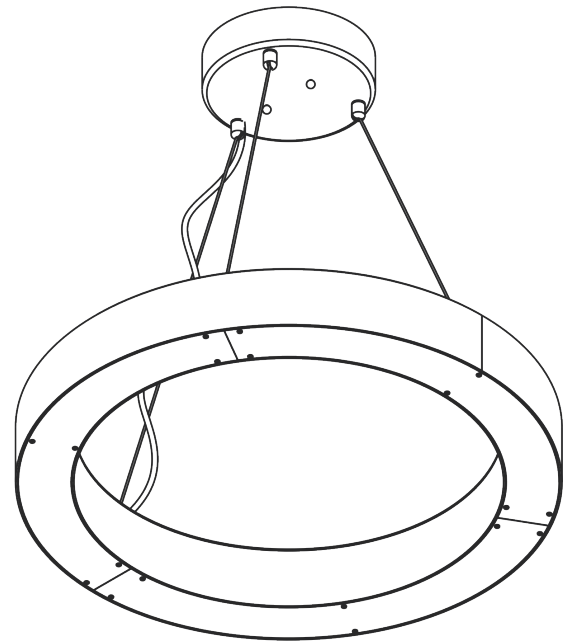

Cat #	Input Power	Lumen Output	LPW	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage
CL-RNG1-10CLED	12W	1,592	132	3000K	80+	>200,000	120-277V
CL-RNG1-20CLED	25W	3,203	128	3000K	80+	>200,000	120-277V
CL-RNG2-30CLED	35W	4,807	137	3000K	80+	>200,000	120-277V
CL-RNG2-40CLED	45W	6,411	142	3000K	80+	>200,000	120-277V
CL-RNG3-50CLED	55W	8,494	154	3000K	80+	>200,000	120-277V
CL-RNG3-60CLED	65W	9,560	147	3000K	80+	>200,000	120-277V

Proudly Manufactured and Assembled in the USA