CLP-3050 Architectural LED Luminaire DESIGN-FUNCTION-QUALITY



CLP-3050

Architectural LED Luminaire



CLP-3050 Traditional Globe. Available in three different sizes and in multiple finishes. **CLP-3050** Post Mount Luminaire is commonly installed in exterior facilities such as: Public Parks, Shopping Plazas and other Business Facilities or Residential Areas.

-10 year/50,000hr limited warranty.

Feactures

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes highly efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant Current, 120~277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- 0-10 Dimming Driver, Occupancy Sensors, Photocell or Wireless Controls (Options)
- Operating Life: >200,000 hours

Construction

- Acrylic Globe and Diecast Aluminum Base.
- 3 Mil Powder Coat Finish
- Frosted, Clear or Opal Acrylic Lens (Options)
- Silicone Gasket to prevent leakage and provide weather-tight protection.

• Mounting: Over 3" OD Pole or Tenon, Adapter is required for other Poles Sizes or Shapes.




Example: CLP-3050-GL10-40CLED-SYM-30K-MV-BLK-30D-OAL



| Cat # | Globe Sizes | Wattage | Light Dist. | Color Temp. | Voltage | Finish | Mounting | Options |
|----------|---|---|---------------------------|--|------------------|--|-----------------------|--|
| CLP-3050 | 10" Globe (GL10) 14" Globe (GL14) 18" Globe (GL18) | 20W (20CLED) 40W (40CLED) 60W (60CLED) | Symmetric (SYM) | 3000K (30K) 4000K (40K) 5000K (50K) | 120-277V (MV) | Black (BLK) White (WHT) Silver (SLR) Bronze (BRZ) Graphite (GPH) Custom (CST) | 3" OD (3OD) | Opal Acrylic Lens (OAL) Frosted Acrylic Lens (FAL) Clear Acrylic Lens (CAL) |

Crystal Lighting www.crystallighting.us

CLP-M56

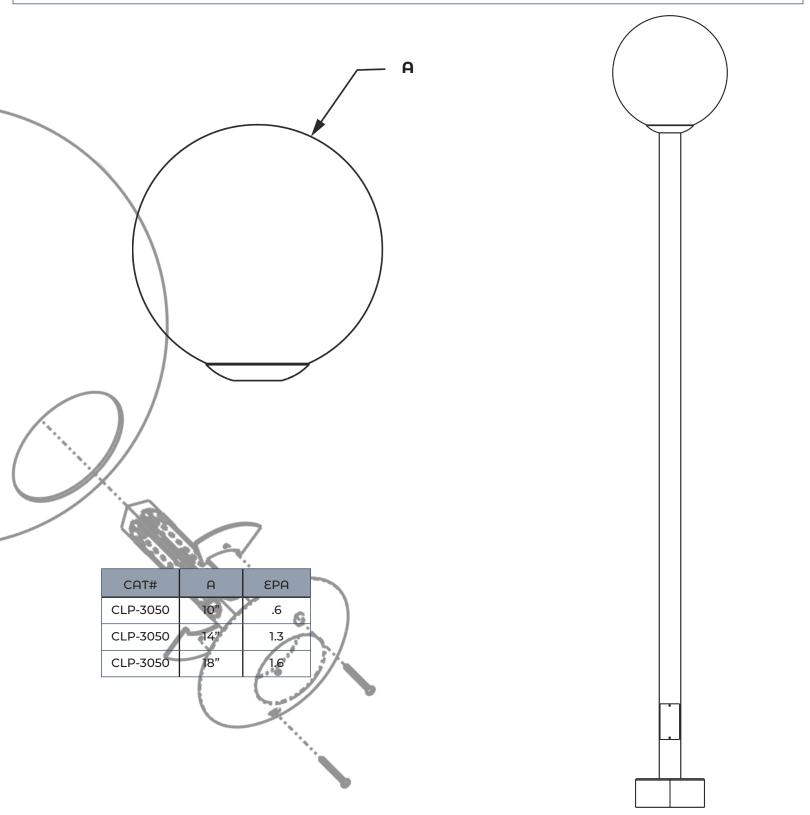

| Cat # | Input Power | Lumen Output | LPW | Color Temp. (CCT) | CRI | Rated Life (L70) | Imput Voltage | HID Equivalent |
|-----------------|----------------|-----------------|-----|----------------------|-----|---------------------|------------------|-------------------|
| CLP-3050-20CLED | 25W | 3,120 | 156 | 5000K | 70+ | >200,000 | 120-277V | 100W MH |
| CLP-3050-40CLED | 45W | 5,475 | 136 | 5000K | 70+ | >200,000 | 120-277V | 150W MH |
| CLP-3050-60CLED | 65W | 8,784 | 146 | 5000K | 70+ | >200,000 | 120-277V | 175W MH |
| | | | | | | | | |

Proudly Manufactured and Assembled in the USA





Crystal Lighting 13182 Flores ST. Santa Fe Springs , CA. 90670 Ph: 562-944-0223 www.crystallighting.us

Proudly manufactured and assembled in the USA