

The CL-DRUM is available in three (3) different sizes and in multiple finishes to choose from to suit desired requirements. It also includes an acrylic lens. The CL-DRUM fixture is commonly installed in interior facilities such as residential homes, indoor shopping areas, offices, and restaurants.


-10 Year Limited Warranty.

Features

- Driver 120/277, 0-10v Dimming Driver.
- Available in 30K/80CRI Standard, 40K, 50k or 90CRI is Optional
- UL listed for damp and wet locations
- Other options available (see ordering guide below)

Construction

- Ceiling Pan Made out of Heavy Gauge Aluminum.
- 3 mil Powder Coating (Ceiling Pan)
- Multiple finishes to choose from (See Ordering Guide)




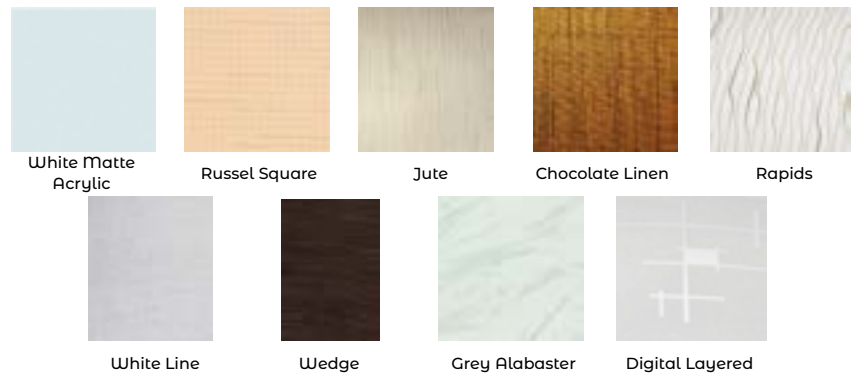


Due to monitor settings and variances, actual colors may vary from your screen display.

Example: CL-DRUMS-10LED-30K-80CRI-MV-WMA-CM



Cat #	Wattage	Color Temp.	CRI	Voltage	Finish	Mounting	Options
CL-DRUM-SM (CL-DRUMS)	10W (10CLEd)	3000K (30K)	80CRI (80CRI)	120-277V (MV)	White Matte Acrylic (WMA)	Celing Mount (CM)	Micro Wave Sensor (MWS)
CL-DRUM-MD (CL-DRUMM)	20W (20CLEd)	4000K (40K)	90CRI (90CRI)		Russel Square (RS)	Aircraft Cable	Emergency Battery (EMR)
CL-DRUM-LG (CL-DRUML)	50W (50CLEd)	5000K (50K)			Jute (JT)	<u>Length</u>	
				Chocolate Linen (CL)	(1'AC)		
				Rapids (RP)	(2'AC)		
				White Line (WL)	(3'AC)		
				Wedge (WD)	(4"AC)		
				Grey Alabaster (GA)	Custom (CST)		
				Digital Layered (DA)			

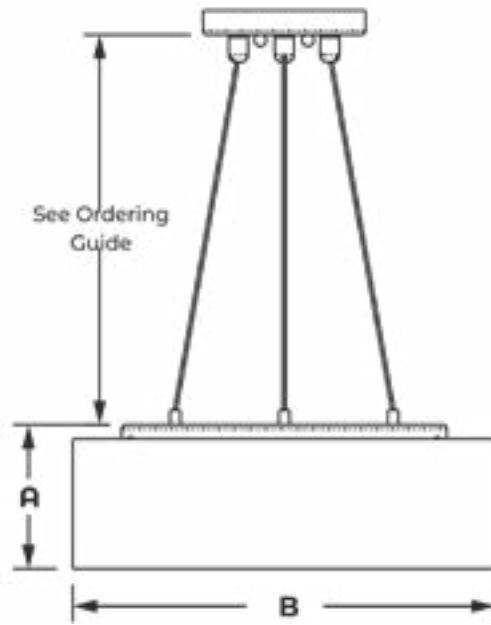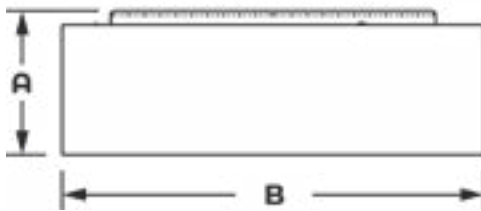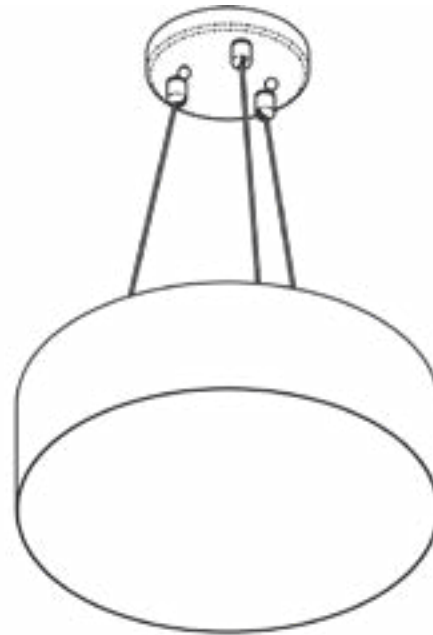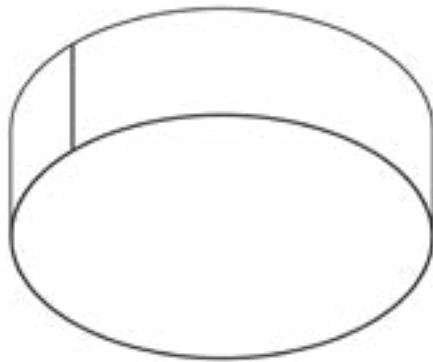

Cat#	A	B
CL-DRUMS	4" 1/2"	15
CL-DRUMM	8	24"
CL-DRUML	9"	36"

Cat #	Input Power	Lumen Output	Color Temp. (CCT)	CRI	Rated Life (L70)	Input Voltage
CL-DRUM-S/L-10CLED	15W	800	3000K	80+	>200,000	120-277V
CL-DRUM-S/L-20CLED	25W	1,900	3000K	80+	>200,000	120-277V
CL-DRUM-S/L-50CLED	55W	5,200	3000K	80+	>200,000	120-277V

Proudly Manufactured and Assembled in the USA