

LYNX-2

ARCHITECTURAL LED BOLLARD
DESIGN-FUNCTION-QUALITY




CRYSTAL LIGHTING CORP.



LYNXB-SGL



LYNXB-D180

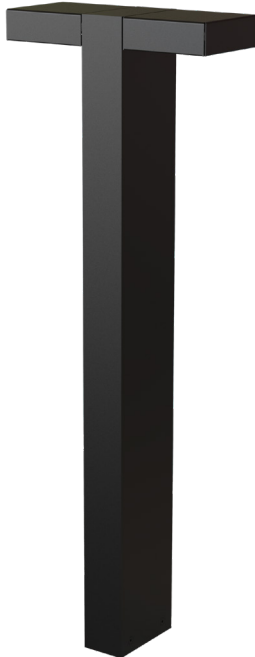

LYNX-B, ARCHITECTURAL LED BOLLARD, SUITABLE FOR WET LOCATIONS. LYNX LINEAR ELEGANT DESIGN IS PERFECT FOR LIGHTING UP, RESIDENTIAL EXTERIORS, APARTMENT COMPLEX, WALKWAYS, PERIMETERS, SCHOOL CAMPUSES, INDUSTRIAL/COMMERCIAL SPACES, PARKING LOTS OR RECREATIONAL PARKS.

-DARK SKY COMPLIANT

-10 YEAR /100,000 WARRANTY.


FEATURES:

- ENERGY SAVINGS: OVER 66% COMPARED TO HID LIGHT SOURCES.
- IMPROVED LUMEN MAINTENANCE.
- UTILIZES HIGH EFFICIENT LUMILED LED'S.
- OPERATING TEMPERATURES: -30°C ~ 60°C.
- DRIVER: CONSTANT CURRENT, 120-277V OR, 480V (OPTIONAL).
- 10KV SURGE PROTECTOR. (STANDARD).
- 0-10V DIMMING, MICRO WAVE SENSORS, PHOTO CELL OR WIRELESS CONTROLS (OPTIONAL)


CONSTRUCTION:

- RECTANGULAR EXTRUDED ALUMINUM.
- CORROSION RESISTANT HARDWARE.
- 3 MIL POWDER COAT FINISH.
- CLEAR OPTICS SYSTEM.
- SILICONE GASKET TO PREVENT LEAKAGE AND PROVIDE WEATHER-TIGHT PROTECTION.
- MOUNTING: 3/8 ANCHOR BOLT.


OPTIC DISTRIBUTION




TYPE 2 (T2)



TYPE 3 (T3)



TYPE 4 (T4)









TYPE 5 (T5)

EXAMPLE: LYNXB-20CLED-T5-40K-MV-SGL-BRZ-SGL-MWS






CAT #	HEIGHT	WATTAGE	LIGHT DIST.	COLOR TEMP.	VOLTAGE	FINISH	MOUNTING	OPTIONS
LYNXB								
LYNX-B (LYNXB)	42"	<u>SINGLE HEAD</u>	TYPE 2	3000K	120-277V	BLACK	SINGLE	MICRO WAVE
	(42)	20W	(T2)	(30K)	(MV)	(BLK)	(SGL)	MOTION SENSOR
		(20CLED)	TYPE 3	4000K	480V	WHITE		(MWS)
	36"	30W	(T3)	(40K)	(HV)	(WHT)	DOUBLE 180°	
	(36)	(30CLED)	TYPE 4	5000K		SILVER	(D180)	BUTTON PHOTO CELL
			(T4)	(50K)		(SLR)		(B-PC)
		<u>DOUBLE HEAD</u>	TYPE 5			BRONZE		
		2x 20W	(T5)			(BRZ)		WIRELESS
		(2x20CLED)				GRAPHITE		CONTROLS
						(GPH)		(WC)
		2X 30W				CUSTOM		
		(2X30CLED)				(CST)		

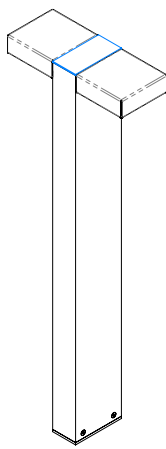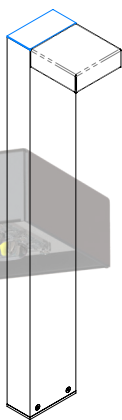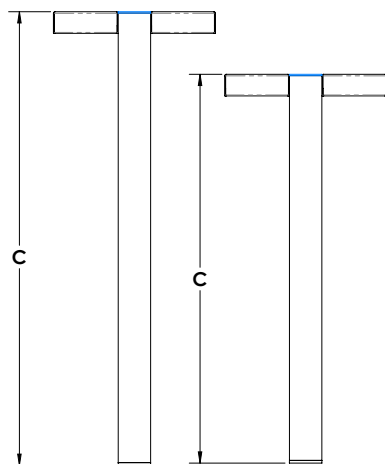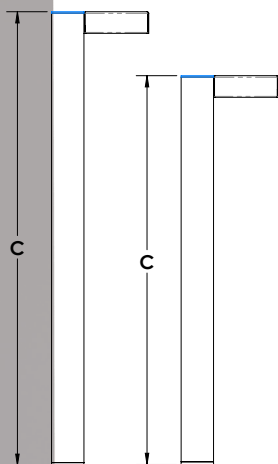

**LYNXB-SGL****LYNXB-D180**

CAT#	A	B	C	EPA	WEIGHT (LBS)
LYNXB-36-SGL	6"	9"	36"	1.50	12.25
LYNXB-42-SGL	6"	9"	42"	1.75	13.5
LYNXB-36-D180	6"	15"	36"	1.50	14
LYNXB-42-D180	6"	15"	42"	1.75	15

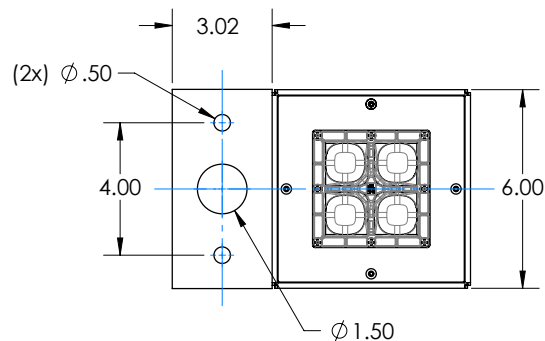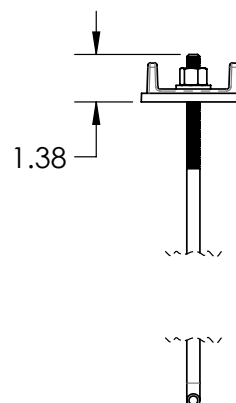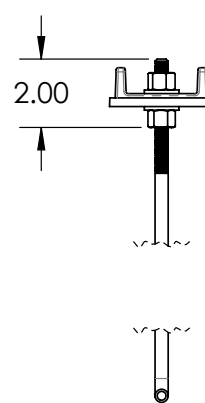**LYNXB- BASE TEMPLATE
(2X) 3/8X18" L ANCHOR BOLT****ANCHOR BOLT PROJECTION****W/ LEVELING NUT****W/OUT LEVELING NUT**

CAT #	INPUT POWER	LUMEN OUTPUT	LPW	COLOR TEMP. (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID EQUIVALENT
LYNXB-20CLED	25W	3036	151	3000K	70+	>200,000	120-277V	50/60HZ	50W HPS
		3223	161	4000K	70+	>200,000	120-277V	50/60HZ	
		3223	161	5000K	70+	>200,000	120-277V	50/60HZ	
LYNXB-40CLED	45W	5301	132	3000K	70+	>200,000	120-277V	50/60HZ	150W HPS
		5628	140	4000K	70+	>200,000	120-277V	50/60HZ	
		5628	140	5000K	70+	>200,000	120-277V	50/60HZ	
LYNXB-50CLED	55W	6288	125	3000K	70+	>200,000	120-277V	50/60HZ	150W HPS
		6676	133	4000K	70+	>200,000	120-277V	50/60HZ	
		6676	133	5000K	70+	>200,000	120-277V	50/60HZ	





CRYSTAL LIGHTING

13182 FLORES ST.

SANTA FE SPRINGS , CA. 90670

PH: 562-944-0223

WWW.CRYSTALLIGHTING.US

PROUDLY DESIGN, MANUFACTURED AND ASSEMBLED IN THE U.S.A