
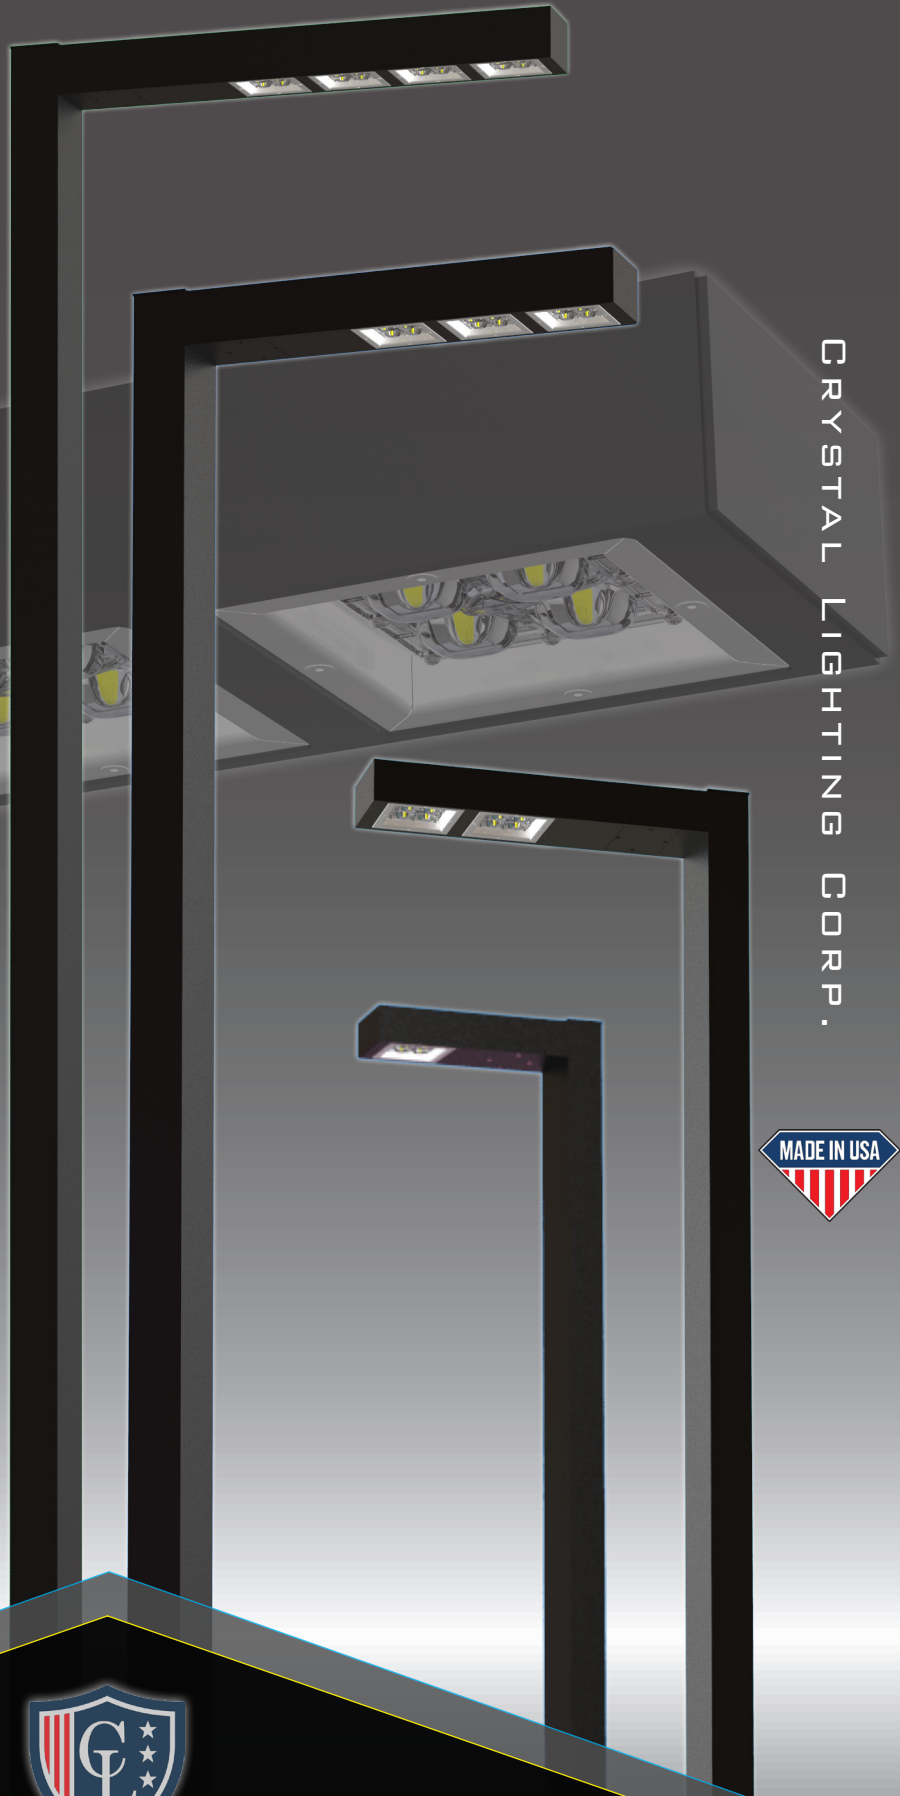



LYNX

ARCHITECTURAL LED LIGHTING
DESIGN-FUNCTION-QUALITY

CRYSTAL LIGHTING CORP.

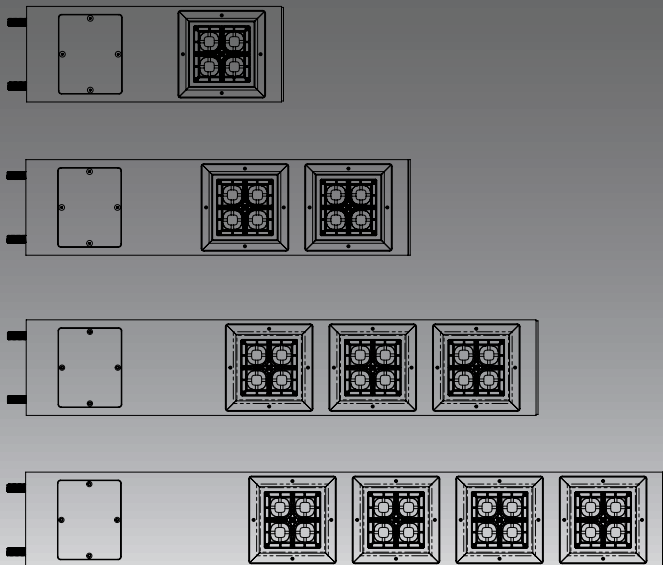

LYNX40

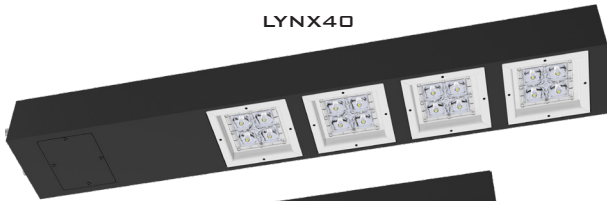

LYNX32



LYNX24



LYNX16



LYNX FAMILY, ARCHITECTURAL LED LUMINAIRE, SUITABLE FOR WET LOCATIONS. LYNX LINEAR ELEGANT DESIGN IS PERFECT FOR LIGHTING UP, RESIDENTIAL EXTERIORS, APARTMENT COMPLEX, WALKWAYS, PERIMETERS, SCHOOL CAMPUSES, INDUSTRIAL/COMMERCIAL SPACES, PARKING LOTS, RECREATIONAL PARKS.

-DARK SKY COMPLIANT

-10 YEAR /100,000 WARRANTY.


FEATURES:

- ENERGY SAVINGS: OVER 66% COMPARED TO HID LIGHT SOURCES.
- IMPROVED LUMEN MAINTENANCE.
- UTILIZES HIGH EFFICIENT LUMILED LED'S.
- OPERATING TEMPERATURES: -30°C ~ 60°C.
- DRIVER: CONSTANT CURRENT, 120-277V OR, 480V (OPTIONAL).
- 10KV SURGE PROTECTOR. (STANDARD).
- 0-10V DIMMING, OCCUPANCY SENSORS, PHOTO CELL OR WIRELESS CONTROLS (OPTIONAL)


CONSTRUCTION:

- RECTANGULAR EXTRUDED ALUMINUM.
- CORROSION RESISTANT HARDWARE.
- 3 MIL POWDER COAT FINISH.
- CLEAR OPTICS SYSTEM.
- SILICONE GASKET TO PREVENT LEAKAGE AND PROVIDE WEATHER-TIGHT PROTECTION.
- MOUNTING: POLE SIDE MOUNT, SINGLE OR DOUBLE 180° OR WALL MOUNT (OPTIONS).


OPTIC DISTRIBUTION




TYPE 2 (T2)



TYPE 3 (T3)



TYPE 4 (T4)



TYPE 5 (T5)



IP66



Wireless Controls



UL LISTED



POWDER COATED TOUGH




BABA COMPLIANT

EXAMPLE: LYNX-20CLED-8-T5-50K-MV-SGL-BRZ-OCC


CAT #	WATTAGE	POLE HEIGHT	LIGHT DIST.	COLOR TEMP.	VOLTAGE	FINISH	MOUNTING	OPTIONS
LYNX-16"L (LYNX16)	20W (20CLED)	4"x6"x.250THK.	TYPE 2 (T2)	3000K (30K)	120-277V (MV)	BLACK (BLK)	SINGLE (SGL)	MOTION SENSOR (OCC)
	40W (40CLED)	8FT (8)	TYPE 3 (T3)	4000K (40K)	480V (HV)	WHITE (WHT)	DOUBLE 180° (D180)	BUTTON PHOTO CELL (B-PC)
	50W (50CLED)	10FT (10)	TYPE 4 (T4)	5000K (50K)		SILVER (SLR)		WIRELESS CONTROLS (WC)
	60W (60CLED)	12FT (12)	TYPE 5 (T5)			BRONZE (BRZ)	<u>PEDESTRIAN LIGHT</u>	
LYNX-24"L (LYNX24)	70W (70CLED)					GRAPHITE (GPH)	LYNX16 (SPECIFIED HEIGHT)	HOUSE SIDE SHIELD (HSS)
	80W (80CLED)	15FT (15)				CUSTOM (CST)	(LYNX16@_FT)	
	100W (100CLED)	18FT (18)					LYNX24 (SPECIFIED HEIGHT)	
							(LYNX24@_FT)	
LYNX-32"L (LYNX32)	120W (120CLED)	20FT (20)					WALL MOUNT (WM)	
	160W (160CLED)							
	180W (180CLED)							
LYNX-40"L (LYNX40)	200W (200CLED)							



LYNX WM

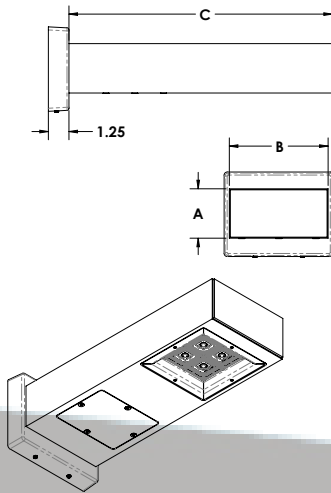

LYNX PM

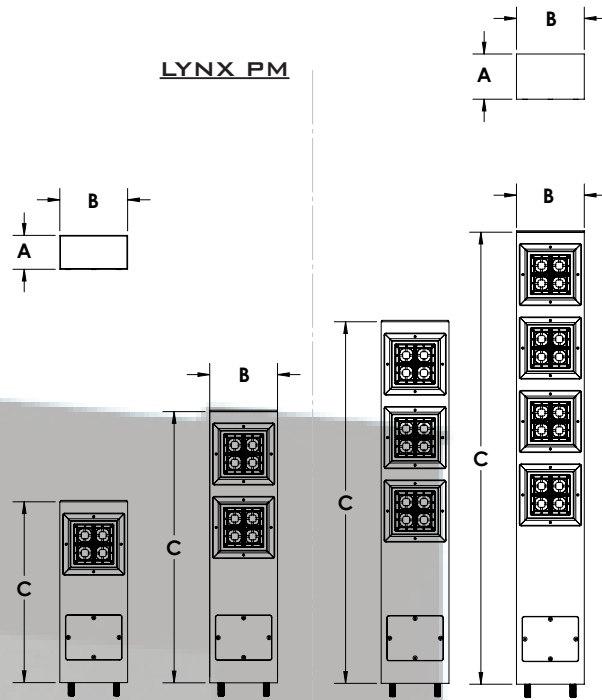

CAT#	A	B	C	EPA	WEIGHT (LBS)
LYNX16	3"	6"	16"	.33	8
LYNX24	3"	6"	24"	.5	12
LYNX32	4"	6"	32"	1.0	18
LYNX40	4"	6"	40"	1.1	22
LYNX-WM	3"	6"	16"	.34	8

CAT #	INPUT POWER	LUMEN OUTPUT	LPW	COLOR TEMP. (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID EQUIVALENT
LYNX WM/16/24-20CLED	25W	3036	151	3000K	70+	>200,000	120-277V	50/60HZ	50W HPS
		3223	161	4000K	70+	>200,000	120-277V	50/60HZ	
		3223	161	5000K	70+	>200,000	120-277V	50/60HZ	
LYNX WM/16/24-40CLED	45W	5301	132	3000K	70+	>200,000	120-277V	50/60HZ	150W HPS
		5628	140	4000K	70+	>200,000	120-277V	50/60HZ	
		5628	140	5000K	70+	>200,000	120-277V	50/60HZ	
LYNX WM/16/24-50CLED	55W	6288	125	3000K	70+	>200,000	120-277V	50/60HZ	150W HPS
		6676	133	4000K	70+	>200,000	120-277V	50/60HZ	
		6676	133	5000K	70+	>200,000	120-277V	50/60HZ	
LYNX24-80CLED	85W	10503	131	3000K	70+	>200,000	120-277V	50/60HZ	250W MH
		11149	139	4000K	70+	>200,000	120-277V	50/60HZ	
		11149	139	5000K	70+	>200,000	120-277V	50/60HZ	
LYNX24-100CLED	105W	12480	124	3000K	70+	>200,000	120-277V	50/60HZ	400W PSMH
		13248	132	4000K	70+	>200,000	120-277V	50/60HZ	
		13248	132	5000K	70+	>200,000	120-277V	50/60HZ	
LYNX32-120CLED	125W	15679	130	3000K	70+	>200,000	120-277V	50/60HZ	400W HPS
		16645	138	4000K	70+	>200,000	120-277V	50/60HZ	
		16645	138	5000K	70+	>200,000	120-277V	50/60HZ	
LYNX32-150CLED	155W	18647	124	3000K	70+	>200,000	120-277V	50/60HZ	400W HPS
		19795	132	4000K	70+	>200,000	120-277V	50/60HZ	
		19795	132	5000K	70+	>200,000	120-277V	50/60HZ	
LYNX40-180CLED	185W	22900	127	3000K	70+	>200,000	120-277V	50/60HZ	750W MH
		24310	135	4000K	70+	>200,000	120-277V	50/60HZ	
		24310	135	5000K	70+	>200,000	120-277V	50/60HZ	
LYNX40-200CLED	205W	24862	124	3000K	70+	>200,000	120-277V	50/60HZ	750W PS
		26393	132	4000K	70+	>200,000	120-277V	50/60HZ	
		26393	132	5000K	70+	>200,000	120-277V	50/60HZ	



PROUDLY DESIGN, MANUFACTURED AND ASSEMBLED IN THE USA



CRYSTAL LIGHTING
13182 FLORES ST.
SANTA FE SPRINGS , CA. 90670
PH: 562-944-0223
WWW.CRYSTALLIGHTING.US

PROUDLY DESIGN, MANUFACTURED AND ASSEMBLED IN THE U.S.A