

SWIRL BOLLARD
ARCHITECTURAL LED BOLLARD
DESIGN-FUNCTION-QUALITY

Crystal Lighting Corp.





SWIRL BOLLARD. ARCHITECTURAL LED PEDESTRIAN LUMINAIRE, THE MODERN CURVED DESIGN COMPLEMENTS A DIVERSE RANGE OF ARCHITECTURAL SETTINGS, SUCH AS RESIDENTIAL EXTERIORS, WALKWAYS, PERIMETERS, SCHOOL CAMPUSES, INDUSTRIAL/COMMERCIAL SPACES, PARKING LOTS, AND RECREATIONAL PARKS. SWIRL BOLLARD OFFERS A VARIETY OF FINISHES (SEE ORDERING GUIDE). SELECT THE COMBINATIONS THAT MEET YOUR NEEDS. SWIRL BOLLARD IS SUITABLE FOR WET LOCATIONS.

-10 YEAR/ 100,000 HOUR LIMITED WARRANTY

CONSTRUCTION:

- CAST ALUMINUM SUB-STRUCTURE AND LASER CUT PANEL
- 2MIL POWDER COAT FINISH.
- OPAL ACRYLIC LENS. (STANDARD)
- SILICONE GASKET TO PREVENT LEAKAGE AND PROVIDE IP66-RATED PROTECTION.
- MOUNTING: (3X) ANCHOR BOLTS 3/8 X 18" LONG.

FEATURES:

- LUMILEDS LINEAR LEDS
- IMPROVED LUMEN MAINTENANCE.
- UTILIZES HIGHLY EFFICIENT LED'S.
- OPERATING TEMPERATURES: -30°C ~ 60°C.
- DRIVER: 120-277V (MV).
- 0-10V DIMMING. (STANDARD).
- 10KV SURGE PROTECTOR. (STANDARD).

EXAMPLE: SWRL-B-20CLED-ASYM-40K-MV-BLK-38ANC




**BABA
COMPLIANT**

CAT #	WATTAGE	LIGHT DIST.	COLOR TEMP.	VOLTAGE	FINISH	MOUNTING	OPTIONS
SWRL-B							
SWIRL BOLLARD (SWRL-B)	20W (20CLED) 30W (30CLED)	ASYMMETRICAL (ASYM)	3000K (30K) 4000K (40K) 5000K (50K)	120-277V (MV)	BLACK (BLK) WHITE (WHT) SILVER (SLR) BRONZE (BRZ) GRAPHITE (GPH) CUSTOM (CST)	3/8 X 18" L ANCHOR BOLT (38-ANC)	*CLEAR ACRYLIC LENS (CAL) BUY AMERICAN ACT. (BAA) BUILD AMERICA, BUY AMERICA (BABA)

* CLEAR ACRYLIC OPTION: INCLUDES AN INTERNAL OPAL ACRYLIC TO COVER LED ENGINE.



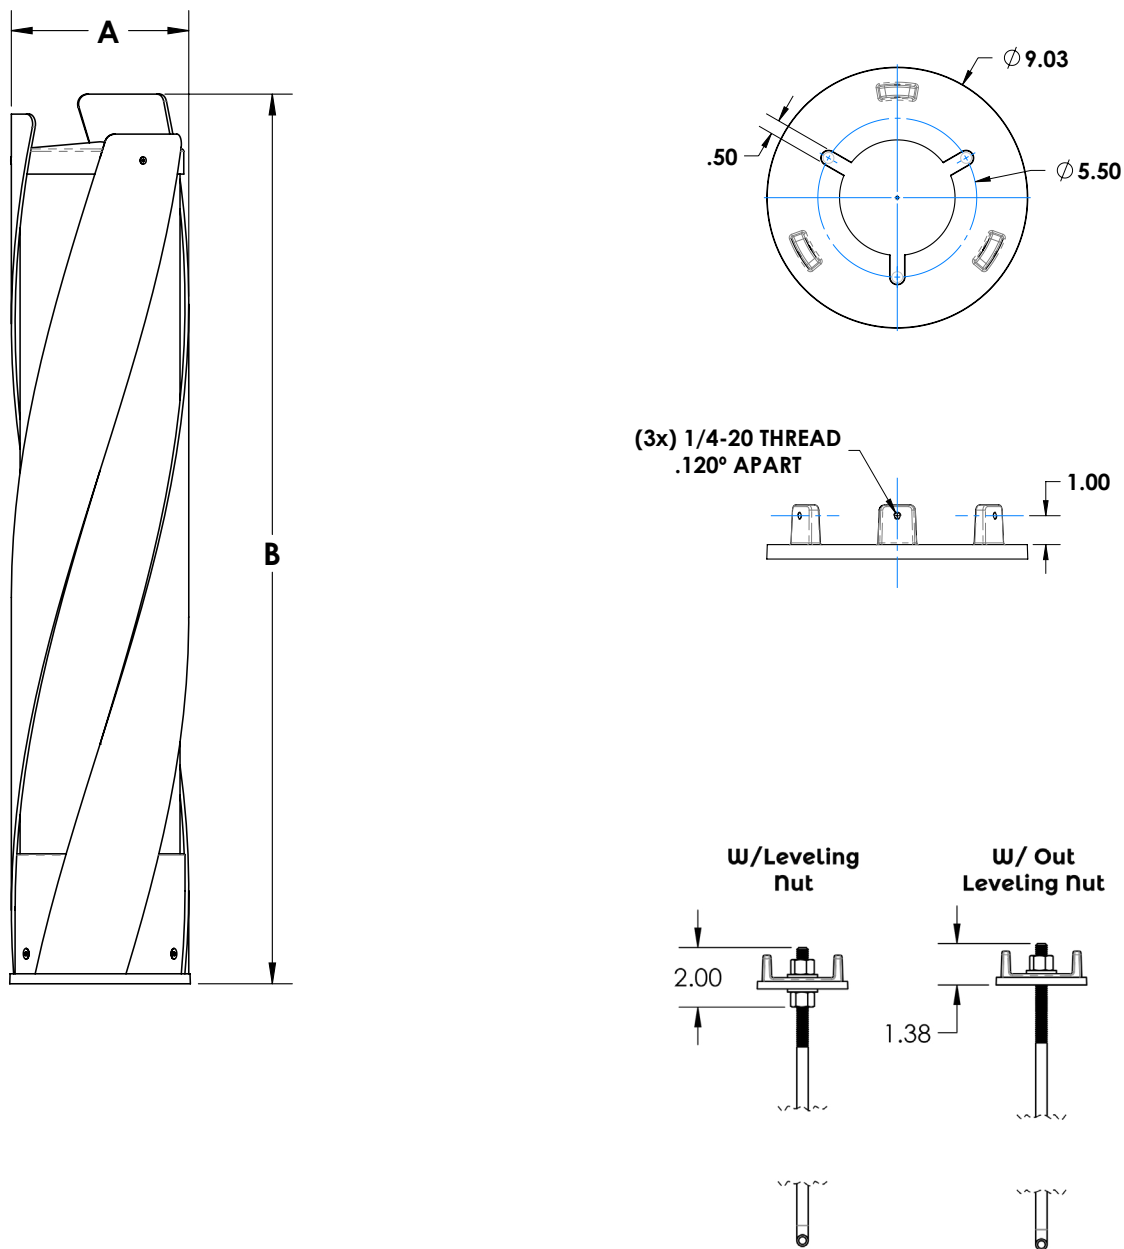

CAT#	A	B	EPA	WEIGHT (LBS)
SWRL-B	8" 7/8	44" 1/2	2.7	29

CAT #	INPUT POWER	LUMEN OUTPUT	LPW	COLOR TEMP. (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE
SWRL-B-20CLED	25W	3,600	164	5000K	80+	>200,000	120-277V
SWRL-B-40CLED	45W	7,000	155	5000K	80+	>200,000	120-277V





Crystal Lighting
13182 Flores ST.
Santa Fe Springs , CA. 90670
Ph: 562-944-0223
www.crystallighting.us

Proudly manufactured and assembled in the USA