





DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

## CL-WPL260

## Altair LED Wall Pack



Ultimate versatility allows wall, post, bollard and horizontal flood light installation. The intelligent design and flexible features will replace your conventional wall packs, it is UL listed for wet locations, Dark Sky compliant. Perfect for lighting up residential exteriors, walkways, entry ways, perimeters, parking garages, school campuses, industrial/commercial spaces. This fixture has a wide rectangular light distribution. A multi purpose wall fixture that will meet your specific requirements. Comes with a 5 year/50,000 hour limited warranty.

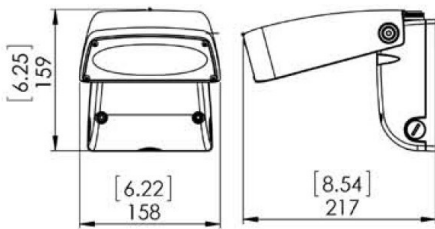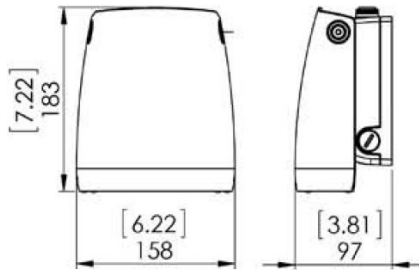

### FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Class 2, Constant current, 120-277v, 50/60Hz,
- UL listed for wet locations
- Dimming, occupancy sensors, photo cell capable (optional)
- Operating Life: >50,000 hours
- Efficient design separates the driver from the LEDs to minimize heat
- Adjustable head for precise aiming

### CONSTRUCTION

- Housing is heavy-duty high quality die-cast aluminum
- 1/2" Coin plugs with O-rings for conduit, sensors or photo cell
- Powder coat silver finish (standard) various colors available (custom).
- Tempered flat clear glass lens
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or use 1/2" Surface Conduit
- IP66 Rated

### OPTIONS

- (OCC) Motion sensor
- (PC) Photo cell
- (WC) Wireless controls



Model Number	INPUT POWER	LUMEN OUTPUT	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
CL-WPL260-13LED	16W	2,202	5000K	70+	>200,000	120-277V	50/60HZ	70w MH
CL-WPL260-26LED	33W	3,926	5000K	70+	>200,000	120-277V	50/60HZ	150w MH
CL-WPL260-40LED	45W	5,392	5000K	70+	>200,000	120-277V	50/60HZ	175w MH

### Ordering Guide

Example: (CL-WPL260-26LED-50-MV-BZ-OCC)

CL-WPL260	MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
	CL-WPL260	13W-13LED 26W-26LED 40W-40LED	30-3000K 40-4000K 50-5000K	MV=120-277V 480-480V	BZ- BRONZE SIL- Silver BLK-BLACK WH- WHITE CUS-CUSTOM	OCC- MOTION SENSOR PC- Photo Cell WC- Wireless controls

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: [www.crystallighting.us](http://www.crystallighting.us)

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA