

DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

CLA-3099

Wall-mounted Cylinder



The **CLA-3099** is a wall-mounted cylinder suitable for wet locations. With its up-and-down light features, the **CLA-3099** is perfect for giving extra luminance to any exterior location that wishes to modernize their appearance. This fixture has a wide light distribution and includes a 5 year/50,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >200,000 hours

CONSTRUCTION

- Housing is heavy-duty aluminum material
- Powder coat bronze finish (standard) various colors available (custom).
- Clear glass lens standard, prismatic glass lens optional
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Comes ready to mount on to a standard junction box.

OPTIONS

- (OCC) Motion sensor
- (PC) Button photo cell
- (WC) Wireless controls
- (PG) Prismatic glass




Model Number	INPUT POWER	LUMEN OUTPUT	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
CLA-3099-20CLED	25W	2,752	4,403	5000K	70+	>200,000	120-277V	50/60HZ	150w PSMH
CLA-3099-30CLED	35W	3,836	6,604	5000K	70+	>200,000	120-277V	50/60HZ	175w HPS
CLA-3099-40CLED	45W	5,504	8,806	5000K	70+	>200,000	120-277V	50/60HZ	250w MH
CLA-3099-60CLED	65W	7,672	13,622	5000K	70+	>200,000	120-277V	50/60HZ	250w HPS

Ordering Guide

Ordering Guide: (CLA-3099-30CLED-50-MV-BZ-WC)

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
CLA-3099	20W-20CLED 30W-30CLED 40W-40CLED 60W-60CLED	27-2700K 30-3000K 35-3500K 40-4000K 50-5000K 57-5700K 65-6500K	MV=120-277V 480-480V	<u>STANDARD:</u> BZ- BRONZE <u>ADD'L COST:</u> GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM	OCC- MOTION SENSOR PC- BUTTON PHOTO CELL PG- PRISMATIC GLASS WC- WIRELESS CONTROL

Dimensions

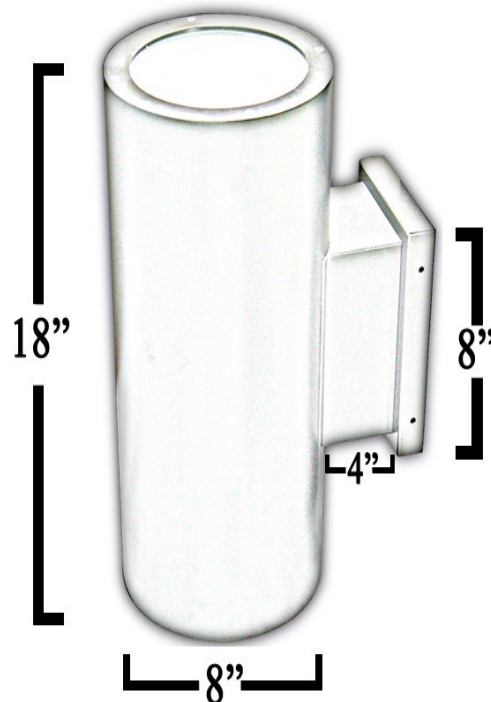

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: www.crystallighting.us

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA