



DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

SM-CLP-336AL


Small Architectural LED area light fixture



Architectural LED area light fixture, suitable for wet locations. Perfect for lighting up residential exteriors, walkways, entry ways, perimeters, storage areas, school campuses, Industrial/commercial spaces, parking lots, recreational parks. This fixture has a wide light distribution. Comes with a 5 year/50,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient Phillips Lumiled LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell and wireless controls capable (optional)
- Operating Life: >60,000 hours

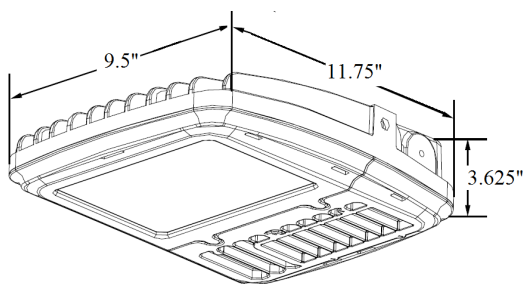

CONSTRUCTION

- Housing is heavy-duty die-cast aluminum
- 1/2" Coin plugs with O-rings for conduit, sensors or photo cell
- Powder coat bronze finish (standard) various colors available (custom).
- Clear Optical Lens
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Mounts directly onto a flat poles, optional round pole or wall mount adapters available



Model Number	INPUT POWER	Delivered Lumens	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
SM-CLP-336AL-20CLED	25W	3,042	5000K	70+	>200,000	120-277V	50/60HZ	100w HPS
SM-CLP-336AL-30CLED	35W	4,207	5000K	70+	>200,000	120-277V	50/60HZ	150w MH
SM-CLP-336AL-40CLED	45W	5,277	5000K	70+	>200,000	120-277V	50/60HZ	175w MH
SM-CLP-336AL-50CLED	55w	6,281	5000K	70+	>200,000	120-277V	50/60HZ	250w MH

Ordering Guide

Example: (SM-CLP-336AL-50CLED-50-MV-BZ-WC)

SM-CLP-336AL	MODEL	WATTS	COLOR TEMP	VOLTAGE	MOUNTING	FINISH	OPTIONS
	SM-CLP-336AL	20W-20CLED 30W-30CLED 40W-40CLED 50W-50CLED	27-2700K 30-3000K 35-3500K 40-4000K 50-5000K 57-5700K 65-6500K	MV=120-277V 480-480V	SF = slip fitter SB= Swivel Bracket KHA=Architectural arm KHAR= Architectural arm round SSFA= Straight Slip fitter arm EHWB= EZ-Hang Wall Bracket LY= Large Yoke Mount	*BZ- BRONZE GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM * Standard	OCC= MOTION SENSOR PC= BUTTON PHOTO CELL EMR= EMR BATTERY GS= GLARE SHIELD PG= PRISMATIC GLASS WC= WIRELESS CONTROL WG= Wire Guard

Crystal Lighting Corporation - 13182 Flores St., Santa Fe Springs, Ca. 90670

Phone: 562-944-0223 - Fax: 562-944-0225 - WEB: www.crystallighting.us

Crystal Lighting is BUY AMERICAN compliant - All products are proudly manufactured and/or assembled in the USA