

DATE	
PROJECT	
TYPE	
NOTE	
PREPARED BY	

CLC-332GSC

LED gas station canopy light fixture



LED gas station canopy light fixture, suitable for wet locations, Perfect for lighting up underpasses, hallways, entry ways, storage areas, parking garages, loading docks, Industrial/commercial spaces. This fixture has a wide light distribution. Comes with a 5 year/50,000 hour limited warranty.

FEATURES

- Energy Savings: Over 66% compared to HID light sources
- Improved lumen maintenance
- Utilizes high efficient LED's
- Operating temperatures: -30°C ~ 60°C
- Driver: Constant current, 120-277v, 50/60Hz, 480v (Optional)
- Suitable for wet locations
- Dimming, occupancy sensors, photo cell capable (optional)
- Operating Life: >60,000 hours

CONSTRUCTION

- Housing is heavy-duty die-cast aluminum backing
- 1/2" Coin plugs with O-rings for conduit, sensors or photo cell
- Powder coat **white finish (standard)** various colors available (custom).
- Sealed with optical lens, not glass
- Silicone gasket to prevent leakage and provide weather-tight protection.
- Mounting: Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box or use 1/2" Surface Conduit

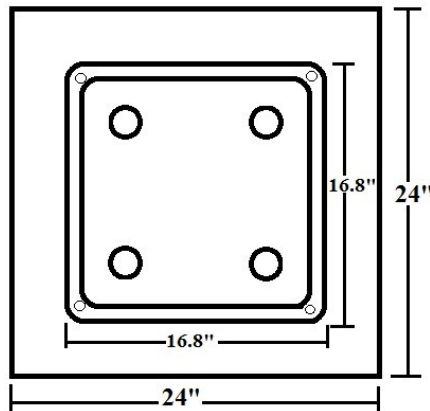

Model Number	INPUT POWER	LUMEN OUTPUT	SCOPTIC	COLOR TEMP (CCT)	CRI	RATED LIFE (L70)	INPUT VOLTAGE	INPUT FREQUENCY	HID Equivalent
CLC-332GSC-100LED	100W	12,250	20,080	5000K	70+	>200,000	120-277V	50/60HZ	330w PSMH
CLC-332GSC-130LED	130W	15,632	25,011	5000K	70+	>200,000	120-277V	50/60HZ	400w MH
CLC-332GSC-170LED	170W	17,000	27,200	5000K	70+	>200,000	120-277V	50/60HZ	400WHPS

Ordering Guide Example: (CLC-332GSC-100LED-50-MV-WH)

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH
CLC-365SM	105W-105LED 156W-156LED	40-4000K 50-5000K	MV=120-277V 480-480V	BZ- BRONZE GRY-GRAY BLK-BLACK WH- WHITE CUS-CUSTOM

